


# Servo amplifier

## mcDSA-B65-Modul

Article number: 1504908

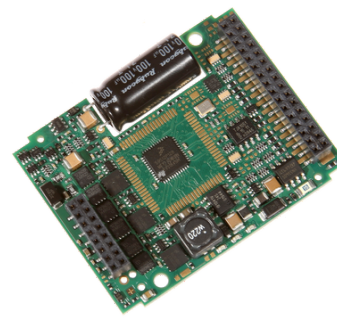

Picture similar

### Technical data

Supply voltages	
Electronic supply voltage Ue*1	9..30 V
Electronic current consumption@ Ue=24V*2	typ. 30 mA
Power supply voltage Up*3	9..60 V
Output current	
Max. output current	15 A
Continuous output current @ Up=24V*4	5 A
Continuous output current @ Up=48V*4	4.3 A
PWM	
Output voltage	100% Up
PWM frequency	12.5, 25*5 kHz
Mechanical	
Size LxWxH	53 x 41 x 10 mm
Weight	18 g
Environment	
Protection class	IP00
Ambient temperature (operation)	-40..70 °C
Ambient temperature (storage)	-40..85 °C
Rel. humidity (non-condensing)	5..90 %
CAN bus	
Protocol	DS301
Max. baudrate	1 Mbit/s
CAN specification	2.0B
Galvanically isolated	no

Sensor supply (Hall)	
Output voltage	5 V
Max. output current	0.2 A
Hall sensors	
Signals	H1,H2,H3
Max. frequency (per channel)	10 kHz
Input voltage	0..5 V
Signal type	open collector, single ended
Digital inputs	
Number - digital inputs	4 (Din0..3)
Low voltage	0..5 V
High voltage	8..30 V
Digital outputs	
Number	1 (Dout0)
Continuous output current	1.5 A
Load	resistive, inductive
Output voltage	Electronic supply voltage Ue
Signal type	positive switching
Analog inputs	
Number	2 (Ain0..1)
Signal type	+/- 10 V, 12 Bit, single ended

\*1 No reverse polarity protection, the destruction limit is at overvoltage of  $\geq 33V$  or short-term peak voltage of  $37V < 1s$ 

\*2 power amplifier switched off, 5V output (sensor supply) is free


\*3 No reverse polarity protection, the destruction limit is at overvoltage of  $\geq 80V$ \*4 connector cable with max. possible cable cross-section, PWM frequency 25 kHz, ambient temperature 40 °C (t >40 °C derating), RMS current: 5 A  $\rightarrow$  4.1 Aeff, 4.3 A  $\rightarrow$  3.5 Aeff

no guarantee, since value is determined empirical, please consider the application notes to determine the continuous current

\*5 default value

Additional technical data are available in mcManual.

## Scheme

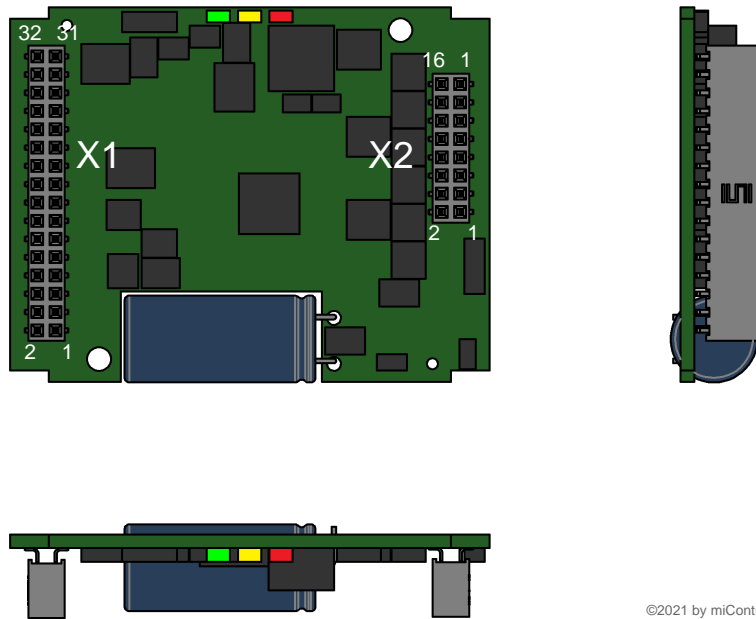

©2021 by miControl

## Terminal assignment

X1	Hall, I/O's and CAN	
1	res.	Reserved
2	res.	Reserved
3	+U5V	5V output voltage for sensor supply Sensors: hall
4	res.	Reserved
5	res.	Reserved
6	res.	Reserved
7	res.	Reserved
8	res.	Reserved
9	H3	Hall sensor 3
10	res.	Reserved
11	H2	Hall sensor 2
12	res.	Reserved
13	H1	Hall sensor 1
14	res.	Reserved
15	CAN Lo	CAN Low
16	res.	Reserved
17	CAN Hi	CAN High
18	res.	Reserved
19	Dout0	Digital output 0
20	res.	Reserved
21	Din2	Digital input 2
22	res.	Reserved
23	Din1	Digital input 1
24	res.	Reserved
25	Din0	Digital input 0
26	res.	Reserved
27	Ain0	Analog input 0
28	res.	Reserved
29	Ain1	Analog input 1
30	Din3	Digital input 3
31	GND	Ground for sensor supply Notice: don't connect with system GND
32	res.	Reserved

X2	Motor	
1	+Up	Power supply voltage
2	res.	Reserved
3	+Up	Power supply voltage
4	FE	Functional earth
5	GND	Ground for power and electronic supply voltage
6	GND	Ground for power and electronic supply voltage
7	Ma	Motor phase A
8	+Ue	Electronic supply voltage
9	Ma	Motor phase A
10	+Ue	Electronic supply voltage
11	Mb	Motor phase B
12	Mb	Motor phase B
13	Mc	Motor phase C
14	res.	Reserved
15	Mc	Motor phase C
16	res.	Reserved