

Servo amplifier

mcDSA-E25-EtherCAT

Article number: 1511107



Picture similar

Technical data

Supply voltages		Sensor supply (Encoder/Hall)	
Electronic supply voltage Ue* ¹	9..30 V	Output voltage	5 V
Electronic current consumption@ Ue=24V* ²	typ. 100 mA	Max. output current	0.2 A
Power supply voltage Up* ³	9..60 V	Incremental encoder	
Output current		Type	incremental
Max. output current	100 A	Signals	A,/A,B,/B,I _{nx} ,/I _{nx}
Continuous output current @ Up=24V* ⁴	35 A	Max. frequency (per channel)	500 kHz
Continuous output current @ Up=48V* ⁴	26 A	Input voltage (24V tolerant)	0..5 V
PWM		Signal type	differential, open collector, single ended
Output voltage	100% Up	Hall sensors	
PWM frequency	25, 32* ⁵ , 50 kHz	Signals	H1,/H1,H2,/H2,H3,/H3
Mechanical		Max. frequency (per channel)	10 kHz
Size LxWxH	111 x 100 x 54 mm	Input voltage (24V tolerant)	0..5 V
Weight	580 g	Signal type	differential, open collector, single ended
Environment		Digital inputs	
Protection class	IP20	Number - digital inputs	8 (Din0..7)
Ambient temperature (operation)	-25..70 °C	Low voltage	0..5 V
Ambient temperature (storage)	-25..85 °C	High voltage	8..30 V
Rel. humidity (non-condensing)	5..90 %	Digital outputs	
CAN bus		Number	2 (Dout0..1)
Protocol	DS301	Continuous output current	1.5 A
Device profile	DS402	Load	resistive, inductive
Max. baudrate	1 Mbit/s	Output voltage	Electronic supply voltage Ue
CAN specification	2.0B	Signal type	positive switching
Galvanically isolated	yes	Analog inputs	
EtherCAT		Number	2 (Ain0..1)
Type	EtherCAT Slave	Signal type - Ain0	+/- 10 V, 12 Bit, differential
Physical layer	100 Base-Tx EtherCAT	Signal type - Ain1	+/- 10 V, 12 Bit, single ended
Bus controller	ET1100		
Max. baudrate	100 Mbit/s		
Number of ports	2xRJ45 (In,Out)		
Protocol	CoE (CANopen over EtherCAT)		

*¹ No reverse polarity protection, the destruction limit is at overvoltage of >= 33V or short-term peak voltage of 37V < 1s*² power amplifier switched off, 5V output (sensor supply) is free*³ No reverse polarity protection, the destruction limit is at overvoltage of >= 80V*⁴ connector cable with max. possible cable cross-section, PWM frequency 25 kHz, ambient temperature 40 °C (t > 40 °C derating), RMS current: 35 A → 28.5 Aeff, 26 A → 21.2 Aeff

no guarantee, since value is determined empirical, please consider the application notes to determine the continuous current

*⁵ default value

Additional technical data are available in mcManual.




miControl® GmbH

Chausseestraße 34

14979 Großbeeren (bei Berlin)

Copyright 2024 by miControl® - Modifications and errors excepted
mcDSA-E25-EtherCAT - PV1.13.00.00 / DV1.00.00.05
Web: www.miControl.de e-mail: info@miControl.de Tel.: +49 (3379) 312 59-0 Fax: +49 (3379) 312 59-19

Scheme

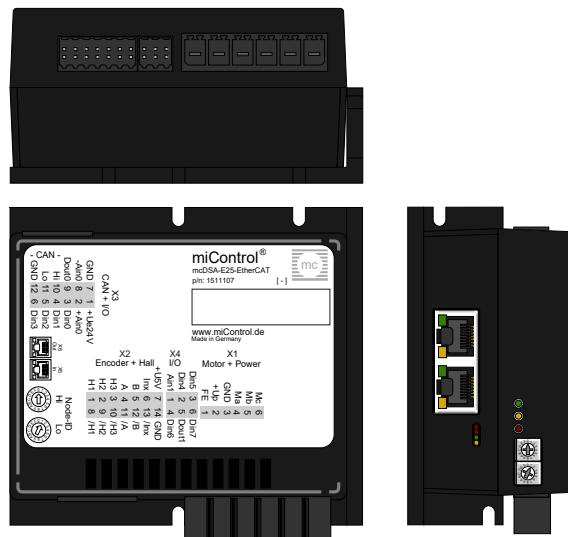

©2023 by miControl

Terminal assignment

X1	Motor	
1	FE	Functional earth
2	+Up	Power supply voltage
3	GND	Ground for power supply voltage
4	Ma	Motor phase A
5	Mb	Motor phase B
6	Mc	Motor phase C
X2	Hall and inc. encoder	
1	H1	Hall sensor 1
2	H2	Hall sensor 2
3	H3	Hall sensor 3
4	A	Inc. encoder, A channel
5	B	Inc. encoder, B channel
6	/inx	Inc. encoder, index channel
7	+U5V	5V output voltage for sensor supply Sensors: encoder, hall
8	/H1	Hall sensor 1 inverted
9	/H2	Hall sensor 2 inverted
10	/H3	Hall sensor 3 inverted
11	/A	Inc. encoder, A channel inverted
12	/B	Inc. encoder, B channel inverted
13	/inx	Inc. encoder, index channel inverted
14	GND	Ground for sensor supply Notice: don't connect with system GND
X3	I/O's and CAN	
1	+Ue24V	Electronic supply voltage
2	+Ain0	Analog input 0, plus
3	Din0	Digital input 0
4	Din1	Digital input 1
5	Din2	Digital input 2
6	Din3	Digital input 3
7	GND	Ground for electronic supply voltage
8	-Ain0	Analog input 0, minus
9	Dout0	Digital output 0
10	CAN Hi	CAN High
11	CAN Lo	CAN Low
12	CAN GND	CAN Ground

X4	I/O's	
1	Ain1	Analog input 1
2	Din4	Digital input 4
3	Din5	Digital input 5
4	Din6	Digital input 6
5	Dout1	Digital output 1
6	Din7	Digital input 7
X5	EtherCAT - In port	
-	In	In
X6	EtherCAT - Out port	
-	Out	Out