

Servo amplifier

mcDSA-E27-EtherCAT

Article number: 1511114



Picture similar

Technical data

Absolute maximum rating (destruction limits)		EtherCAT
Power supply voltage Up no polarity reversal protection	80 V	Type EtherCAT Slave
Continuous Electronic supply voltage Ue no polarity reversal protection	33 V	Physical layer 100 Base-Tx EtherCAT
Short term peak voltage < 1s Ue no polarity reversal protection	37 V	Bus controller ET1100
Power		Max. baudrate 100 Mbit/s
Electronic supply voltage Ue	9..30 V	Number of ports 2xRJ45 (In,Out)
Electronic current consumption@ Ue=24V* ¹	typ. 70 mA	Protocol CoE (CANopen over EtherCAT)
Power supply voltage Up	9..60 V	
Max. output current	100 A	
Continuous output current @ Up=24V* ²	35 A	
Continuous output current @ Up=48V* ²	26 A	
PWM		
Output voltage	100% Up	
PWM frequency	25, 32* ³ , 50 kHz	
Mechanical		
Size LxWxH	111 x 100 x 54 mm	
Weight	580 g	
Environment		
Protection class	IP20	
Ambient temperature (operation)* ⁴	-40..70 °C	
Ambient temperature (storage)	-40..85 °C	
Rel. humidity (non-condensing)	5..90 %	
CAN bus		
Protocol	DS301	
Device profile	DS402	
Max. baudrate	1 Mbit/s	
CAN specification	2.0B	
Galvanically isolated	yes	
EtherCAT		
Type	EtherCAT Slave	
Physical layer	100 Base-Tx EtherCAT	
Bus controller	ET1100	
Max. baudrate	100 Mbit/s	
Number of ports	2xRJ45 (In,Out)	
Protocol	CoE (CANopen over EtherCAT)	
Sensor supply (Encoder)		
Output voltage	5 V	
Max. output current	0.2 A	
Encoder		
Type	sin / cos	
Signals	+Sin,-Sin,+Cos,-Cos	
Resolution	13 bit per sine period	
Input voltage	1 V peak-peak, differential	
Signal type	sine/cosine, analog, differential	
Digital inputs		
Number - digital inputs	7 (Din0..6)	
Low voltage	0..5 V	
High voltage	8..30 V	
Digital outputs		
Number	2 (Dout0..1)	
Continuous output current	1.5 A	
Load	resistive, inductive	
Output voltage	Electronic supply voltage Ue	
Signal type	positive switching	
Analog inputs		
Number	2 (Ain0..1)	
Signal type - Ain0	+/- 10 V, 12 Bit, differential	
Signal type - Ain1	+/- 10 V, 12 Bit, single ended	

*¹ power amplifier switched off, 5V output (sensor supply) is free*² connector cable with max. possible cable cross-section, PWM frequency 25 kHz, ambient temperature 40 °C (t >40 °C derating), RMS current: 35 A → 28.5 Aeff, 26 A → 21.2 Aeff

no guarantee, since value is determined empirical, please consider the application notes to determine the continuous current

*³ default value*⁴ Hex-Switches should be not used at T < -25°C (setting of node ID only possible by firmware parameters)

Additional technical data are available in mcManual.



miControl® GmbH

Chausseestraße 34


14979 Großbeeren (bei Berlin)

Copyright 2023 by miControl® - Modifications and errors excepted

mcDSA-E27-EtherCAT - PV1.11.00.00 / DV1.00.00.00

Web: www.miControl.de e-mail: info@miControl.de Tel.: +49 (3379) 312 59-0 Fax: +49 (3379) 312 59-19

Scheme

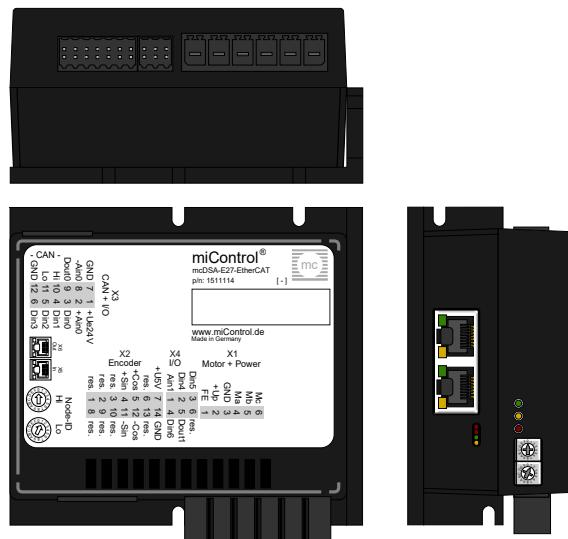

©2023 by miControl

Terminal assignment

X1	Motor	
1	FE	Functional earth
2	+Up	Power supply voltage
3	GND	Ground for power supply voltage
4	Ma	Motor phase A
5	Mb	Motor phase B
6	Mc	Motor phase C
X2	Encoder	
1	res.	Reserved
2	res.	Reserved
3	res.	Reserved
4	+Sin	Encoder, plus sine signal
5	+Cos	Encoder, plus cosine signal
6	res.	Reserved
7	+U5V	5V output voltage for sensor supply Sensors: encoder
8	res.	Reserved
9	res.	Reserved
10	res.	Reserved
11	-Sin	Encoder, minus sine signal
12	-Cos	Encoder, minus cosine signal
13	res.	Reserved
14	GND	Ground for sensor supply Notice: don't connect with system GND
X3	I/O's and CAN	
1	+Ue24V	Electronic supply voltage
2	+Ain0	Analog input 0, plus
3	Din0	Digital input 0
4	Din1	Digital input 1
5	Din2	Digital input 2
6	Din3	Digital input 3
7	GND	Ground for electronic supply voltage
8	-Ain0	Analog input 0, minus
9	Dout0	Digital output 0
10	CAN Hi	CAN High
11	CAN Lo	CAN Low
12	CAN GND	CAN Ground

X4	I/O's	
1	Ain1	Analog input 1
2	Din4	Digital input 4
3	Din5	Digital input 5
4	Din6	Digital input 6
5	Dout1	Digital output 1
6	res.	Reserved
X5	EtherCAT - In port	
-	In	In
X6	EtherCAT - Out port	
-	Out	Out