

Servo amplifier

mcDSA-E55-EtherCAT-HC

Article number: 1513204



Picture similar

Technical data

| Absolute maximum rating (destruction limits) | | Sensor supply (Encoder/Hall) |
|--|--------------------------------|---|
| Power supply voltage Up no polarity reversal protection | 80 V | Output voltage 5 V |
| Continuous Electronic supply voltage Ue no polarity reversal protection | 33 V | Max. output current 0.2 A |
| Short term peak voltage < 1s Ue no polarity reversal protection | 37 V | Incremental encoder |
| Power | | Type incremental |
| Electronic supply voltage Ue | 9..30 V | Signals A,/A,B,/B,I _{nx} |
| Electronic current consumption@ Ue=24V ^{*1} | typ. 70 mA | Max. frequency (per channel) 500 kHz |
| Power supply voltage Up | 9..60 V | Input voltage 0..5 V |
| Max. output current | 50 A | Signal type differential, open collector, single ended |
| Continuous output current @ Up=24V ^{*2} | 14.5 A | Hall sensors |
| Continuous output current @ Up=48V ^{*2} | 14.5 A | Signals H1,H2,H3 |
| PWM | | Max. frequency (per channel) 10 kHz |
| Output voltage | 100% Up | Input voltage 0..5 V |
| PWM frequency | 25, 32 ^{*3} , 50 kHz | Signal type open collector, single ended |
| Mechanical | | Digital inputs |
| Size LxWxH | 87 x 74 x 49 mm | Number - digital inputs 8 (Din0..7) |
| Weight | 226 g | Low voltage 0..5 V |
| Environment | | High voltage 8..30 V |
| Protection class | IP20 | Digital outputs |
| Ambient temperature (operation) | -40..70 °C | Number 4 (Dout0..3) |
| Ambient temperature (storage) | -40..85 °C | Continuous output current 0.3 A |
| Rel. humidity (non-condensing) | 5..90 % | Load Dout0..2 resistive, low inductive |
| CAN bus | | Load Dout3 resistive, inductive |
| Protocol | DS301 | Output voltage Electronic supply voltage Ue |
| Device profile | DS402 | Signal type positive switching |
| Max. baudrate | 1 Mbit/s | Analog inputs |
| CAN specification | 2.0B | Number 3 (Ain0..2) |
| Galvanically isolated | no | Signal type - Ain0..1 +/- 10 V, 12 Bit, differential |
| EtherCAT | | Signal type - Ain2 / PT1000 0..5 V, 12 Bit, single ended / PT1000 |
| Type | EtherCAT Slave | |
| Physical layer | 100 Base-Tx EtherCAT | |
| Bus controller | ET1100 | |
| Max. baudrate | 100 Mbit/s | |
| Number of ports | 2xRJ45 (In,Out) | |
| Protocol | CoE (CANopen over EtherCAT) | |

^{*1} power amplifier switched off, 5V output (sensor supply) is free, bus not connected^{*2} connector cable with max. possible cable cross-section, PWM frequency 32 kHz, ambient temperature 40 °C (t >40 °C derating), RMS current: 14.5 A → 11.8 A_{eff} no guarantee, since value is determined empirical, please consider the application notes to determine the continuous current^{*3} default value

Additional technical data are available in mcManual.



miControl® GmbH

Chausseestraße 34


14979 Großbeeren (bei Berlin)

Copyright 2023 by miControl® - Modifications and errors excepted

mcDSA-E55-EtherCAT-HC - PV1.11.00.00 / DV1.00.00.05

Web: www.miControl.de e-mail: info@miControl.de Tel.: +49 (3379) 312 59-0 Fax: +49 (3379) 312 59-19

Scheme

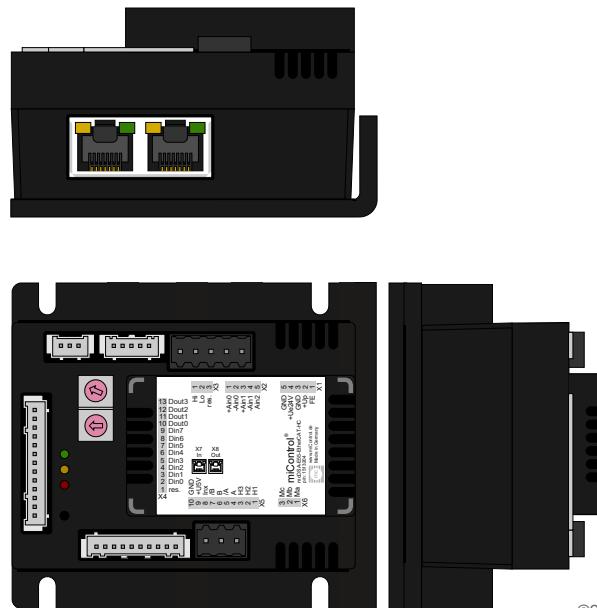

©2023 by miControl

Terminal assignment

| X1 Supply | | |
|---------------------------|--------|--------------------------------------|
| 1 | FE | Functional earth |
| 2 | +Up | Power supply voltage |
| 3 | GND | Ground for power supply voltage |
| 4 | +Ue24V | Electronic supply voltage |
| 5 | GND | Ground for electronic supply voltage |
| X2 Analog inputs | | |
| 1 | +Ain0 | Analog input 0, plus |
| 2 | -Ain0 | Analog input 0, minus |
| 3 | +Ain1 | Analog input 1, plus |
| 4 | -Ain1 | Analog input 1, minus |
| 5 | Ain2 | Analog Input 2 (5V) / PT1000 |
| X3 CAN bus | | |
| 1 | CAN Hi | CAN High |
| 2 | CAN Lo | CAN Low |
| 3 | res. | Reserved |
| X4 Digital inputs/outputs | | |
| 1 | res. | Reserved |
| 2 | Din0 | Digital input 0 |
| 3 | Din1 | Digital input 1 |
| 4 | Din2 | Digital input 2 |
| 5 | Din3 | Digital input 3 |
| 6 | Din4 | Digital input 4 |
| 7 | Din5 | Digital input 5 |
| 8 | Din6 | Digital input 6 |
| 9 | Din7 | Digital input 7 |
| 10 | Dout0 | Digital output 0 |
| 11 | Dout1 | Digital output 1 |
| 12 | Dout2 | Digital output 2 |
| 13 | Dout3 | Digital output 3 |

| X5 Hall and inc. encoder | | |
|--------------------------|------|---|
| 1 | H1 | Hall sensor 1 |
| 2 | H2 | Hall sensor 2 |
| 3 | H3 | Hall sensor 3 |
| 4 | A | Inc. encoder, A channel |
| 5 | /A | Inc. encoder, A channel inverted |
| 6 | B | Inc. encoder, B channel |
| 7 | /B | Inc. encoder, B channel inverted |
| 8 | Inx | Inc. encoder, index channel |
| 9 | +U5V | 5V output voltage for sensor supply Sensors: encoder, hall |
| 10 | GND | Ground for sensor supply Notice: don't connect with system GND |
| X6 Motor | | |
| 1 | Ma | Motor phase A |
| 2 | Mb | Motor phase B |
| 3 | Mc | Motor phase C |
| X7 EtherCAT - In port | | |
| - | In | In |
| X8 EtherCAT - Out port | | |
| - | Out | Out |