

Servo amplifier

mcDSA-E57-PROFINET

Article number: 1515615



Picture similar

Technical data

Absolute maximum rating (destruction limits)		PROFINET		
Power supply voltage Up no polarity reversal protection	80 V	Type	Slave	
Continuous Electronic supply voltage Ue no polarity reversal protection	33 V	Physical layer	100 Base-Tx	
Short term peak voltage < 1s Ue no polarity reversal protection	37 V	Max. baudrate	100 Mbit/s	
Power			Number of ports	
Electronic supply voltage Ue	9..30 V	Sensor supply (Encoder)	2xRJ45 (PORT1, PORT2)	
Electronic current consumption@ Ue=24V ^{*1}	typ. 85 mA	Output voltage	5 V	
Power supply voltage Up	9..60 V	Max. output current	0.2 A	
Max. output current	50 A	Encoder		
Continuous output current @ Up=24V ^{*2}	9.5 A	Type	sin / cos	
Continuous output current @ Up=60V ^{*2}	9 A	Signals	+Sin,-Sin,+Cos,-Cos	
PWM			Resolution	
Output voltage	100% Up	Input voltage	1 V peak-peak, differential	
PWM frequency	25, 32 ^{*3} , 50 kHz	Signal type	sine/cosine, analog, differential	
Mechanical			Digital inputs	
Size LxWxH	78 x 74 x 49 mm	Number - digital inputs	8 (Din0..7)	
Weight	141 g	Low voltage	0.5 V	
Environment			High voltage	
Protection class	IP20	Digital outputs	8.30 V	
Ambient temperature (operation)	-40..70 °C	Number	4 (Dout0..3)	
Ambient temperature (storage)	-40..85 °C	Continuous output current	0.3 A	
Rel. humidity (non-condensing)	5..90 %	Load Dout0..2	resistive, low inductive	
CAN bus			Load Dout3	
Protocol	DS301	Output voltage	resistive, inductive	
Device profile	DS402	Signal type	Electronic supply voltage Ue	
Max. baudrate	1 Mbit/s	Analog inputs	positive switching	
CAN specification	2.0B	Number	3 (Ain0..2)	
Galvanically isolated	no	Signal type - Ain0..1	+/- 10 V, 12 Bit, differential	
		Signal type - Ain2 / PT1000	0..5 V, 12 Bit, single ended / PT1000	

^{*1} power amplifier switched off, 5V output (sensor supply) is free, bus not connected^{*2} connector cable with max. possible cable cross-section, PWM frequency 32 kHz, ambient temperature 40 °C (t >40 °C derating), RMS current: 9.5 A → 7.8 Aeff, 9 A → 7.3 Aeff

no guarantee, since value is determined empirical, please consider the application notes to determine the continuous current

^{*3} default value

Additional technical data are available in mcManual.



miControl® GmbH

Chausseestraße 34


14979 Großbeeren (bei Berlin)

Copyright 2023 by miControl® - Modifications and errors excepted

mcDSA-E57-PROFINET - PV1.11.00.00 / DV1.00.00.02

Web: www.miControl.de e-mail: info@miControl.de Tel.: +49 (3379) 312 59-0 Fax: +49 (3379) 312 59-19

Scheme

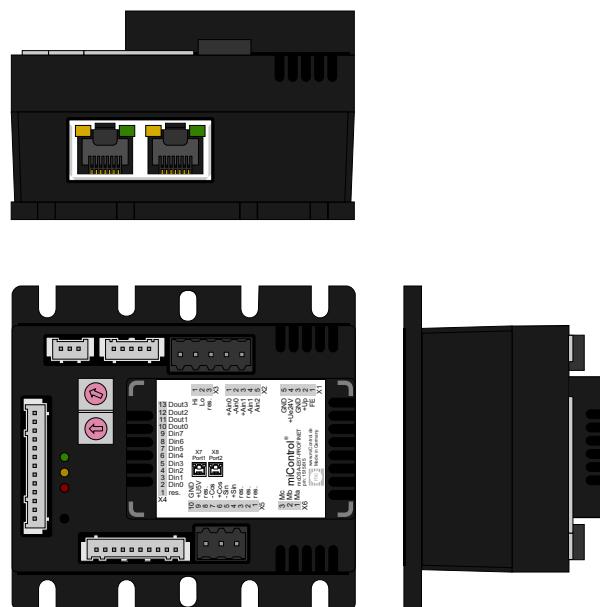

©2023 by miControl

Terminal assignment

X1 Supply		
1	FE	Functional earth
2	+Up	Power supply voltage
3	GND	Ground for power supply voltage
4	+Ue24V	Electronic supply voltage
5	GND	Ground for electronic supply voltage
X2 Analog inputs		
1	+Ain0	Analog input 0, plus
2	-Ain0	Analog input 0, minus
3	+Ain1	Analog input 1, plus
4	-Ain1	Analog input 1, minus
5	Ain2	Analog Input 2 (5V) / PT1000
X3 CAN bus		
1	CAN Hi	CAN High
2	CAN Lo	CAN Low
3	res.	Reserved
X4 Digital inputs/outputs		
1	res.	Reserved
2	Din0	Digital input 0
3	Din1	Digital input 1
4	Din2	Digital input 2
5	Din3	Digital input 3
6	Din4	Digital input 4
7	Din5	Digital input 5
8	Din6	Digital input 6
9	Din7	Digital input 7
10	Dout0	Digital output 0
11	Dout1	Digital output 1
12	Dout2	Digital output 2
13	Dout3	Digital output 3

X5 Encoder		
1	res.	Reserved
2	res.	Reserved
3	res.	Reserved
4	+Sin	Encoder, plus sine signal
5	-Sin	Encoder, minus sine signal
6	+Cos	Encoder, plus cosine signal
7	-Cos	Encoder, minus cosine signal
8	res.	Reserved
9	+U5V	5V output voltage for sensor supply Sensors: encoder
10	GND	Ground for sensor supply Notice: don't connect with system GND
X6 Motor		
1	Ma	Motor phase A
2	Mb	Motor phase B
3	Mc	Motor phase C
X7 PROFINET - PORT1		
-	PORT1	PORT1
X8 PROFINET - PORT2		
-	PORT2	PORT2