

Servo amplifier

mcDSA-F12

Article number: 1515972



Picture similar

Technical data

Supply voltages	
Electronic supply voltage U_e^{*1}	9..30 V
Electronic current consumption @ $U_e=24V^{*2}$	typ. 70 mA
Power supply voltage U_p^{*3}	9..60 V
Output current	
Max. output current	225 A
Continuous output current @ $U_p=24V^{*4}$	70 A
Continuous output current @ $U_p=48V^{*4}$	63 A
PWM	
PWM frequency	32 kHz
Commutation type	Field Oriented Control
Mechanical	
Size LxWxH	111 x 100 x 39 mm
Weight	400 g
Environment	
Protection class	IP20
Ambient temperature (operation) ^{*5}	-40..70 °C
Ambient temperature (storage)	-40..85 °C
Rel. humidity (non-condensing)	5..90 %
CAN bus	
Protocol	DS301
Device profile	DS402
Max. baudrate	1 Mbit/s
CAN specification	2.0B
Galvanically isolated	yes
Sensor supply (Encoder/Hall)	
Output voltage	5 V
Max. output current	0.2 A

Digital inputs	
Number - digital inputs	4 (Din0..3)
Low voltage	0..5 V
High voltage	8..30 V
Digital outputs	
Number	1 (Dout0)
Continuous output current	1.5 A
Load	resistive, low inductive
Output voltage	Electronic supply voltage U_e
Signal type	positive switching
Analog inputs	
Number	1 (Ain0)
Signal type - Ain	+/- 10 V, 12 Bit, differential
Encoder	
Type	sin / cos
Signals	+Sin, -Sin, +Cos, -Cos
Resolution	13 bit per sine period
Input voltage	1 V peak-peak, differential
Signal type	sine/cosine, analog, differential

*1 No reverse polarity protection, the destruction limit is at overvoltage of $\geq 33V$ or short-term peak voltage of $37V < 1s$

*2 power amplifier switched off, 5V output (sensor supply) is free

*3 No reverse polarity protection, the destruction limit is at overvoltage of $\geq 70V$

*4 connector cable with max. possible cable cross-section, PWM frequency 32 kHz, ambient temperature 40 °C ($t > 40$ °C derating), RMS current: 70 A \rightarrow 49.5 Aeff, 63 A \rightarrow 44.5 Aeff

no guarantee, since value is determined empirical, please consider the application notes to determine the continuous current


*5 Hex-Switches should be not used at $T < -25^\circ C$ (setting of node ID only possible by firmware parameters)

Additional technical data are available in mcManual.



miControl® GmbH
Chausseestraße 34
14979 Großbeeren (bei Berlin)

Scheme

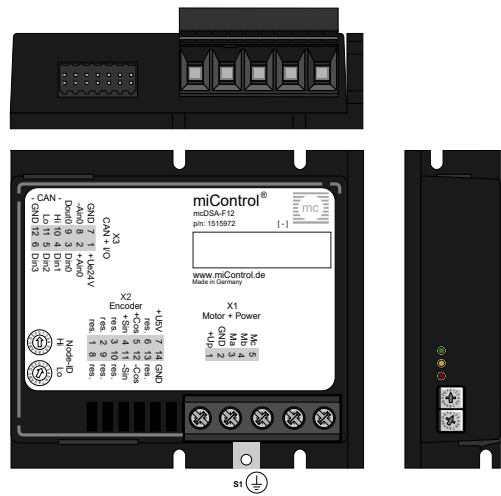

©2024 by miControl

Terminal assignment

X1 Motor		
1	+Up	Power supply voltage
2	GND	Ground for power supply voltage
3	Ma	Motor phase A
4	Mb	Motor phase B
5	Mc	Motor phase C
X2 Encoder		
1	res.	Reserved
2	res.	Reserved
3	res.	Reserved
4	+Sin	Encoder, plus sine signal
5	+Cos	Encoder, plus cosine signal
6	res.	Reserved
7	+U5V	5V output voltage for sensor supply Sensors: encoder
8	res.	Reserved
9	res.	Reserved
10	res.	Reserved
11	-Sin	Encoder, minus sine signal
12	-Cos	Encoder, minus cosine signal
13	res.	Reserved
14	GND	Ground for sensor supply Notice: don't connect with system GND
X3 I/O's and CAN		
1	+Ue24V	Electronic supply voltage
2	+Ain0	Analog input 0, plus
3	Din0	Digital input 0
4	Din1	Digital input 1
5	Din2	Digital input 2
6	Din3	Digital input 3
7	GND	Ground for electronic supply voltage
8	-Ain0	Analog input 0, minus
9	Dout0	Digital output 0
10	CAN Hi	CAN High
11	CAN Lo	CAN Low
12	CAN GND	CAN Ground
S1 Screw (M4)		
-	FE	Functional earth