


Servo amplifier

mcDS-m3-25cXX

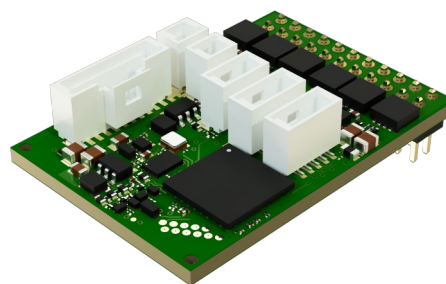

Picture similar

1. Technical data

Power stage						
Name	Symbol	Description	min.	Value	max.	Unit
U _p Ma, Mb, Mc	U _p	Power supply voltage	10	-	60	V
	I _{out_MAX}	Max. output current	-	-	25	A
	U _{out}	Output voltage	-	-	97	% U _p
	FPWM	PWM frequency	-	40	-	kHz
	η _p	Efficiency	-	typ. 98	-	%
• I _{out_CONT} applies to max. 40°C ambient temperatur.						

Electronic supply						
Name	Symbol	Description	min.	Value	max.	Unit
U _e	U _e	Electronic supply voltage	10	24	30	V
	U _{e_WO_DOUT}	Electronic supply voltage for devices without DOUT's	10	24	60	V
	I _e	Electronic supply current @ U _e =24V	-	typ. 70	-	mA
• I _e applies to unconnected DOUT's and unconnected HALL/Encoder.						

Inc.-Encoder and Hall						
Name	Symbol	Description	min.	Value	max.	Unit
INC-A, INC-B, INC- INX, H1, H2, H3	U _{INC_HALL_LOW}	Input voltage: low-state	0	-	1.2	V
	U _{INC_HALL_HIGH}	Input voltage: high-state	3.5	-	5.0	V
	R _{INC_HALL}	Input resistance	-	1	-	kΩ
	F _{INC}	Input frequency inc. encoder	-	-	500	kHz
	F _{HALL}	Input frequency hall sensors	-	-	10	kHz
	VDD _{INC}	5V Output supply voltage for inc. encoder	4.9	5.1	5.3	V
	VDD _{HALL}	5V Output supply voltage for hall sensors	4.9	5.1	5.3	V
	I _{VDD_INC} I _{VDD_HALL}	Summarized output supply current for inc. encoder and hall sensors	-	-	190	mA
- Internal 1 kΩ Pull-Up-Resistors to VDD_{INC} on Encoder inputs. - Internal 1 kΩ Pull-Up-Resistors to VDD_{HALL} on Hall inputs. - Reference potential is VSS_{INC} and VSS_{HALL}.						

Digital inputs						
Name	Symbol	Description	min.	Value	max.	Unit
DIN0, DIN1, DIN2, DIN3, STO-A, STO-B	U _{DIN_LOW}	Input voltage: low-state	0	-	5	V
	U _{DIN_HIGH}	Input voltage: high-state	9	-	30	V
	R _{DIN}	Input resistance	-	24.1	-	kΩ
• Reference potential is GND.						

Digital outputs						
Name	Symbol	Description	min.	Value	max.	Unit
DOUT0-BR, DOUT1	U _{DOUT_HIGH}	Output voltage: high-state	0	-	U _e	
	I _{DOUT_HIGH}	Output current: high-state	-	-	700	mA
- Reference potential is GND. - DOUT0-BR has a free-wheeling diode to GND - DOUT0-BR load: resistive, inductive - DOUT1 load: resistive - The outputs switch to U_e.						

Analog inputs						
Name	Symbol	Description	min.	Value	max.	Unit
MT, AIN	U _{MT}	Input voltage	0	-	2.047	V
	U _{AIN}	Input voltage	0	-	10.24	V
	R _{MT}	Input resistance	-	1.5	-	kΩ
	R _{AIN}	Input resistance	-	15	-	kΩ
- MT: Temp. sensor KTY84-130, PT1000. - MT, AIN Tolerance = 3% - Reference potential for MT is VSS_{MT}. - Reference potential for AIN is VSS.						

Magnetchip-Encoder		
Name	Description	Value
MCHIP-ENC	Resolution	15 Bit
	Magnet	neodymium alloy (N35) Ø 6 mm x 2.5 mm
	Air gap between magnet and sensor	typ. 1 mm
	Radial positioning accuracy	0.5 mm
A typical magnet is a cylinder made of a neodymium alloy (N35) with a diameter of 6 mm and a height of 2.5 mm, inserted into an aluminum shaft. The typical air gap between the magnet and the sensor is between 1 mm and 2 mm. To ensure good measurement linearity, the sensor must be positioned with a radial accuracy of typically 0.5 mm.		


Environment		
Name	Description	Value
ENV	Protection class	IP00
	Ambient temperature - operating	-40 .. 105 °C
	Ambient temperature - storage	-40 .. 70 °C
	Pollution degree	1
	Humidity	5 .. 90 % (non-condensing)

CAN Interface		
Name	Description	Value
CAN-Hi, CAN-Lo	Protocol	CANopen DS301
	Device profile	DS402 and miControl
	CAN specification	2.0.B
	Max. baudrate	1 Mbit/s
	Galvanically isolated	no

Mechanical		
Name	Description	Value
MECH	Dimensions LxBxH	35 x 24 x 10.7 mm
	Weight	t.b.d

Additional technical data are available in mcManual.

1. Scheme

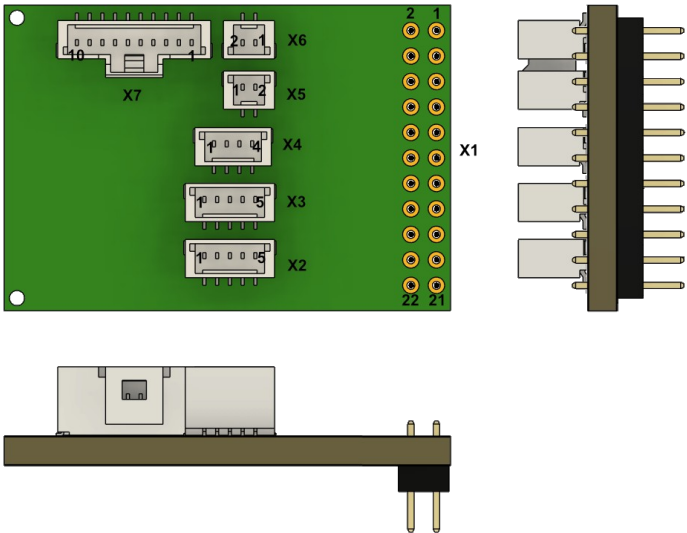

2. Terminal assignment

X1	Supply and Motor	
1	res.	Reserved
2	U _e	Electronic supply voltage
3	Ma	Motor phase A
4	Ma	Motor phase A
5	Ma	Motor phase A
6	Ma	Motor phase A
7	U _p	Power supply voltage
8	U _p	Power supply voltage
9	U _p	Power supply voltage
10	U _p	Power supply voltage
11	Mb	Motor phase B
12	Mb	Motor phase B
13	Mb	Motor phase B
14	Mb	Motor phase B
15	GND	Ground
16	GND	Ground
17	GND	Ground
18	GND	Ground
19	Mc	Motor phase C
20	Mc	Motor phase C
21	Mc	Motor phase C
22	Mc	Motor phase C

X2	Encoder	
1	INC-A	Inc. encoder, A channel
2	INC-B	Inc. encoder, B channel
3	INC-INX	Inc. encoder, index channel
4	VDD _{INC}	5V output voltage for incremental sensor supply
5	VSS _{INC}	Ground for incremental sensor supply

X3	Hall	
1	H1	Hall input 1
2	H2	Hall input 2
3	H3	Hall input 3
4	VDD _{HALL}	5V output voltage for Hall supply
5	VSS _{HALL}	Ground for Hall supply

X4	Brake, Temperatur	
1	DOUT0-BR	Digital output 0 / parking brake
2	VSS _{BR}	Ground for Digital output 0 / parking brake
3	MT	External motor temperature input (KTY84-130, PT1000)
4	VSS _{MT}	Ground for external motor temperature (KTY84-130, PT1000)

X5	CAN	
1	CAN-Hi	CAN interface for external connections
2	CAN-Lo	CAN interface for external connections

X6	CAN	
1	CAN-Hi	CAN interface for external connections
2	CAN-Lo	CAN interface for external connections

X7	I/O's	
1	res.	Reserved
2	AIN	Analog input
3	res.	Reserved
4	DIN0	Digital input 0
5	DIN1	Digital input 1
6	DIN2	Digital input 2
7	DIN3	Digital input 3
8	res.	Reserved
9	DOUT0-BR	Digital output 0 / parking brake
10	DOUT1	Digital output 1