

Servo amplifier

mcDSA-E25XC-PN

Article number: 1513198



Picture similar

Technical data

Absolute maximum rating	
Voltage (destruction limit) Up no polarity reversal protection	80 V
Continuous voltage (destruction limit) Ue no polarity reversal protection	33 V
Short term peak voltage < 1s Ue (destruction limit) no polarity reversal protection	37 V
Power	
Electronic supply voltage Ue	9..30 V
Electronic current consumption@ Ue=24V*1	typ. 70 mA
Power supply voltage Up	9..60 V
Max. output current	160 A
Continuous output current @ Up=24V*2 with Heatsink (Art.No.1511832)	65 A 70 A
Continuous output current @ Up=48V*2 with Heatsink (Art.No.1511832)	55 A 65 A
PWM	
Output voltage	100% Up
PWM frequency	25, 32*3, 50 kHz
Mechanical	
Size LxWxH	111 x 100 x 54.4 mm
Weight	584 g
Environment	
Protection class	IP20
Ambient temperature (operation)	-25..70 °C
Ambient temperature (storage)	-25..85 °C
Rel. humidity (non-condensing)	5..90 %
CAN bus	
Protocol	DS301
Device profile	DS402
Max. baudrate	1 Mbit/s
CAN specification	2.0B
Galvanically isolated	yes

PROFINET	
Type	Slave
Physical layer	100 Base-Tx
Max. baudrate	100 Mbit/s
Number of ports	2xRJ45 (PORT1, PORT2)
Sensor supply (Encoder/Hall)	
Output voltage	5 V
Max. output current	0.2 A
Incremental encoder	
Type	incremental
Signals	A,/A,B,/B,Inx,/Inx
Max. frequency (per channel)	500 kHz
Input voltage (24V tolerant)	0..5 V
Signal type	differential, open collector, single ended
Hall sensors	
Signals	H1,/H1,H2,/H2,H3,/H3
Max. frequency (per channel)	10 kHz
Input voltage (24V tolerant)	0..5 V
Signal type	differential, open collector, single ended
Digital inputs	
Number - digital inputs	6 (Din0..5)
Number hardware enable inputs	2 (EN-A..B)
Low voltage	0..5 V
High voltage	8..30 V
Notice	Din5 parallel with Dout2*4
Digital outputs	
Number	3 (Dout0..2)
Continuous output current	1.5 A
Load	resistive, inductive
Output voltage	Electronic supply voltage Ue
Signal type	positive switching
Notice	Dout2 parallel with Din5
Analog inputs	
Number	2 (Ain0..1)
Signal type - Ain0	+/- 10 V, 12 Bit, differential
Signal type - Ain1	+/- 10 V, 12 Bit, single ended

*1 power amplifier switched off, 5V output (sensor supply) is free

*2 connector cable with max. possible cable cross-section, PWM frequency 32 kHz, ambient temperature 40 °C (t >40 °C derating), RMS current: 55 A → 45 Aeff, 65 A → 53 Aeff, 70 A → 57 Aeff


no guarantee, since value is determined empirical, please consider the application notes to determine the continuous current

*3 default value

*4 Input voltage must not exceed Electronic supply voltage Ue

Additional technical data are available in mcManual.

Scheme

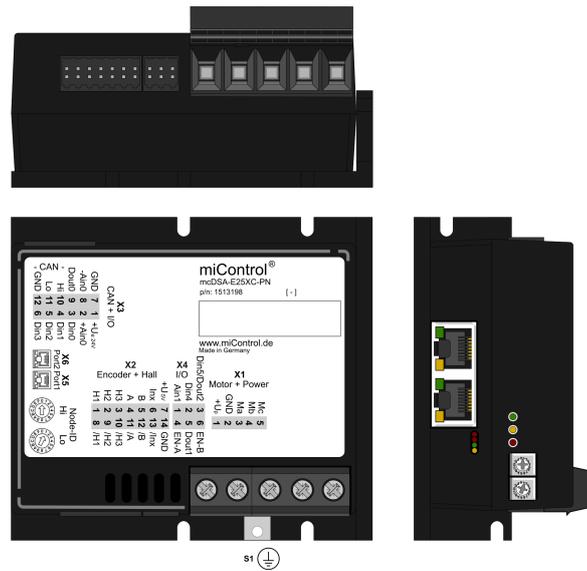

©2018 by miControl

Terminal assignment

X1 Motor		
1	+Up	Power supply voltage
2	GND	Ground for power supply voltage
3	Ma	Motor phase A
4	Mb	Motor phase B
5	Mc	Motor phase C
X2 Hall and inc. encoder		
1	H1	Hall sensor 1
2	H2	Hall sensor 2
3	H3	Hall sensor 3
4	A	Inc. encoder, A channel
5	B	Inc. encoder, B channel
6	Inx	Inc. encoder, index channel
7	+U5V	5V auxiliary voltage (hall and encoder)
8	/H1	Hall sensor 1 inverted
9	/H2	Hall sensor 2 inverted
10	/H3	Hall sensor 3 inverted
11	/A	Inc. encoder, A channel inverted
12	/B	Inc. encoder, B channel inverted
13	/Inx	Inc. encoder, index channel inverted
14	GND	Ground for 5V auxiliary voltage (hall and encoder)
X3 I/O's and CAN		
1	+Ue24V	Electronic supply voltage
2	+Ain0	Analog input 0, plus
3	Din0	Digital input 0
4	Din1	Digital input 1
5	Din2	Digital input 2
6	Din3	Digital input 3
7	GND	Ground for electronic supply voltage
8	-Ain0	Analog input 0, minus
9	Dout0	Digital output 0
10	CAN Hi	CAN High
11	CAN Lo	CAN Low
12	CAN GND	CAN Ground
X4 I/O's		
1	Ain1	Analog input 1
2	Din4	Digital input 4
3	Din5/Dout2	Digital input 5 / Digital output 2
4	EN-A	Hardware enable channel A
5	Dout1	Digital output 1
6	EN-B	Hardware enable channel B

S1 Screw (M4)		
-	FE	Functional earth
X5 PROFINET - PORT1		
-	PORT1	PORT1
X6 PROFINET - PORT2		
-	PORT2	PORT2