

# Servo amplifier

## mcDSA-E55-EtherCAT

Article number: 1513205



Picture similar

**Technical data**

<b>Absolute maximum rating (destruction limits)</b>		<b>Sensor supply (Encoder/Hall)</b>
Power supply voltage Up no polarity reversal protection	80 V	Output voltage 5 V
Continuous Electronic supply voltage Ue no polarity reversal protection	33 V	Max. output current 0.2 A
Short term peak voltage < 1s Ue no polarity reversal protection	37 V	<b>Incremental encoder</b>
<b>Power</b>		Type incremental
Electronic supply voltage Ue	9..30 V	Signals A,/A,B,/B,Inx
Electronic current consumption@ Ue=24V* <sup>1</sup>	typ. 70 mA	Max. frequency (per channel) 500 kHz
Power supply voltage Up	9..60 V	Input voltage 0..5 V
Max. output current	50 A	Signal type differential, open collector, single ended
Continuous output current @ Up=24V* <sup>2</sup>	10 A	<b>Hall sensors</b>
Continuous output current @ Up=48V* <sup>2</sup>	10 A	Signals H1,H2,H3
<b>PWM</b>		Max. frequency (per channel) 10 kHz
Output voltage	100% Up	Input voltage 0..5 V
PWM frequency	25, 32* <sup>3</sup> , 50 kHz	Signal type open collector, single ended
<b>Mechanical</b>		<b>Digital inputs</b>
Size LxWxH	78 x 74 x 49 mm	Number - digital inputs 8 (Din0..7)
Weight	141 g	Low voltage 0..5 V
<b>Environment</b>		High voltage 8..30 V
Protection class	IP20	<b>Digital outputs</b>
Ambient temperature (operation)	-40..70 °C	Number 4 (Dout0..3)
Ambient temperature (storage)	-40..85 °C	Continuous output current 0.3 A
Rel. humidity (non-condensing)	5..90 %	Load Dout0..2 resistive, low inductive
<b>CAN bus</b>		Load Dout3 resistive, inductive
Protocol	DS301	Output voltage Electronic supply voltage Ue
Device profile	DS402	Signal type positive switching
Max. baudrate	1 Mbit/s	<b>Analog inputs</b>
CAN specification	2.0B	Number 3 (Ain0..2)
Galvanically isolated	no	Signal type - Ain0..1 +/- 10 V, 12 Bit, differential
<b>EtherCAT</b>		Signal type - Ain2 / PT1000 0..5 V, 12 Bit, single ended / PT1000
Type	EtherCAT Slave	
Physical layer	100 Base-Tx EtherCAT	
Bus controller	ET1100	
Max. baudrate	100 Mbit/s	
Number of ports	2xRJ45 (In,Out)	
Protocol	CoE (CANopen over EtherCAT)	

\*<sup>1</sup> power amplifier switched off, 5V output (sensor supply) is free, bus not connected\*<sup>2</sup> connector cable with max. possible cable cross-section, PWM frequency 32 kHz, ambient temperature 40 °C (t >40 °C derating), RMS current: 10 A → 8.2 Aeff  
no guarantee, since value is determined empirical, please consider the application notes to determine the continuous current\*<sup>3</sup> default value

Additional technical data are available in mcManual.



miControl® GmbH

Chausseestraße 34


14979 Großbeeren (bei Berlin)

Copyright 2023 by miControl® - Modifications and errors excepted

mcDSA-E55-EtherCAT - PV1.11.00.00 / DV1.00.00.05

Web: [www.miControl.de](http://www.miControl.de) e-mail: [info@miControl.de](mailto:info@miControl.de) Tel.: +49 (3379) 312 59-0 Fax: +49 (3379) 312 59-19

## Scheme

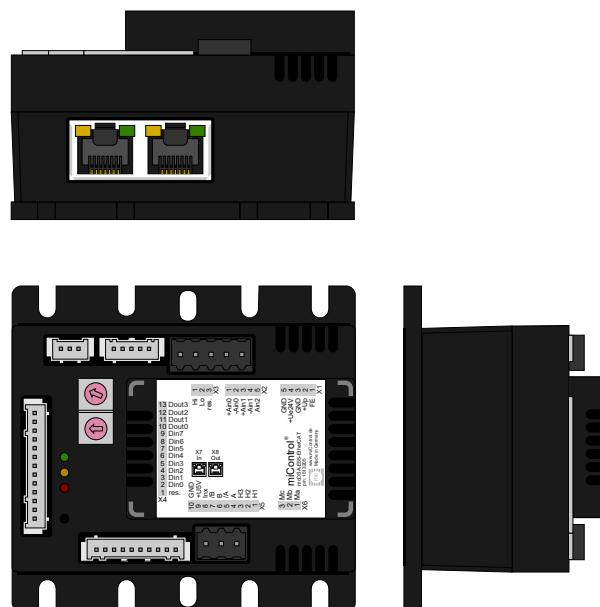

©2023 by miControl

## Terminal assignment

X1 Supply		
1	FE	Functional earth
2	+Up	Power supply voltage
3	GND	Ground for power supply voltage
4	+Ue24V	Electronic supply voltage
5	GND	Ground for electronic supply voltage
X2 Analog inputs		
1	+Ain0	Analog input 0, plus
2	-Ain0	Analog input 0, minus
3	+Ain1	Analog input 1, plus
4	-Ain1	Analog input 1, minus
5	Ain2	Analog Input 2 (5V) / PT1000
X3 CAN bus		
1	CAN Hi	CAN High
2	CAN Lo	CAN Low
3	res.	Reserved
X4 Digital inputs/outputs		
1	res.	Reserved
2	Din0	Digital input 0
3	Din1	Digital input 1
4	Din2	Digital input 2
5	Din3	Digital input 3
6	Din4	Digital input 4
7	Din5	Digital input 5
8	Din6	Digital input 6
9	Din7	Digital input 7
10	Dout0	Digital output 0
11	Dout1	Digital output 1
12	Dout2	Digital output 2
13	Dout3	Digital output 3

X5 Hall and inc. encoder		
1	H1	Hall sensor 1
2	H2	Hall sensor 2
3	H3	Hall sensor 3
4	A	Inc. encoder, A channel
5	/A	Inc. encoder, A channel inverted
6	B	Inc. encoder, B channel
7	/B	Inc. encoder, B channel inverted
8	Inx	Inc. encoder, index channel
9	+U5V	5V output voltage for sensor supply Sensors: encoder, hall
10	GND	Ground for sensor supply Notice: don't connect with system GND
X6 Motor		
1	Ma	Motor phase A
2	Mb	Motor phase B
3	Mc	Motor phase C
X7 EtherCAT - In port		
-	In	In
X8 EtherCAT - Out port		
-	Out	Out