

# Servo amplifier

## mcDSA-E55-HC

Article number: 1513862

 Certification: 


Picture similar

### Technical data

| Supply voltages   |                               |
|---|-------------------------------|
| Electronic supply voltage $U_e^{*2}$                    | 9..30 V                       |
| Electronic current consumption @ $U_e=24V^{*3}$         | typ. 40 mA                    |
| Power supply voltage $U_p^{*4}$                         | 9..60 V                       |
| Output current  |                               |
| Max. output current                                     | 50 A                          |
| Continuous output current (certified UL) <sup>*5</sup>  |                               |
| @ $U_p \leq 24V$  | 9.5 A                         |
| @ $U_p \leq 60V$  | 9 A                           |
| Continuous output current (not certified) <sup>*6</sup> |                               |
| @ $U_p \leq 24V$  | 14.5 A                        |
| @ $U_p \leq 48V$  | 14.5 A                        |
| PWM   |                               |
| Output voltage  | 100% $U_p$                    |
| PWM frequency   | 25, 32 <sup>*7</sup> , 50 kHz |
| Mechanical  |                               |
| Size LxWxH  | 87 x 74 x 29 mm               |
| Weight  | 150 g                         |
| Environment   |                               |
| Protection class  | IP20                          |
| Ambient temperature (operation) (certified UL)          | -40..40 °C                    |
| Ambient temperature (operation) (not certified)         | -40..70 °C                    |
| Ambient temperature (storage)                           | -40..85 °C                    |
| Rel. humidity (non-condensing)                          | 5..90 %                       |
| CAN bus   |                               |
| Protocol  | DS301                         |
| Device profile  | DS402                         |
| Max. baudrate   | 1 Mbit/s                      |
| CAN specification                                       | 2.0B                          |
| Galvanically isolated                                   | no                            |

| Sensor supply (Encoder/Hall)              |  |
|---|--|
| Output voltage                            | 5 V  |
| Max. output current                       | 0.2 A                                      |
| Incremental encoder                       |  |
| Type                                      | incremental                                |
| Signals                                   | A,/A,B,/B,Inx                              |
| Max. frequency (per channel)              | 500 kHz                                    |
| Input voltage                             | 0..5 V                                     |
| Signal type                               | differential, open collector, single ended |
| Hall sensors                              |  |
| Signals                                   | H1,H2,H3                                   |
| Max. frequency (per channel)              | 10 kHz                                     |
| Input voltage                             | 0..5 V                                     |
| Signal type                               | open collector, single ended               |
| Digital inputs                            |  |
| Number - digital inputs                   | 8 (Din0..7)                                |
| Low voltage                               | 0..5 V                                     |
| High voltage                              | 8..30 V                                    |
| Digital outputs                           |  |
| Number                                    | 4 (Dout0..3)                               |
| Continuous output current (certified UL)  | 0.3 A                                      |
| Continuous output current (not certified) | 0.3 A                                      |
| Load Dout0..2                             | resistive, low inductive                   |
| Load Dout3                                | resistive, inductive                       |
| Output voltage                            | Electronic supply voltage $U_e$            |
| Signal type                               | positive switching                         |
| Analog inputs                             |  |
| Number                                    | 3 (Ain0..2)                                |
| Signal type - Ain0..1                     | +/- 10 V, 12 Bit, differential             |
| Signal type - Ain2 / PT1000               | 0..5 V, 12 Bit, single ended / PT1000      |

\*1 The certified performance data must be observed (see UL Instruction Note)

\*2 No reverse polarity protection, the destruction limit is at overvoltage of  $\geq 33V$  or short-term peak voltage of  $37V < 1s$

\*3 power amplifier switched off, 5V output (sensor supply) is free

\*4 No reverse polarity protection, the destruction limit is at overvoltage of  $\geq 80V$

\*5 connector cable with max. possible cable cross-section, PWM frequency 32 kHz, ambient temperature 40 °C, I/O's and 5V output active, RMS current: 9.5 A → 7.8 Aeff, 9 A → 7.3 Aeff

\*6 connector cable with max. possible cable cross-section, PWM frequency 32 kHz, ambient temperature 40 °C, I/O's and 5V output free, RMS current: 14.5 A → 11.8 Aeff, 14.5 A → 11.8 Aeff

no guarantee, since value is determined empirical, please consider the application notes to determine the continuous current

\*7 default value

Additional technical data are available in mcManual.



miControl® GmbH


Chausseestraße 34

14979 Großbeeren (bei Berlin)

 Copyright 2024 by miControl® - Modifications and errors excepted  
 mcDSA-E55-HC - PV1.13.00.00 / DV1.00.00.06

Web: www.miControl.de e-mail: info@miControl.de Tel.: +49 (3379) 312 59-0 Fax: +49 (3379) 312 59-19

Scheme

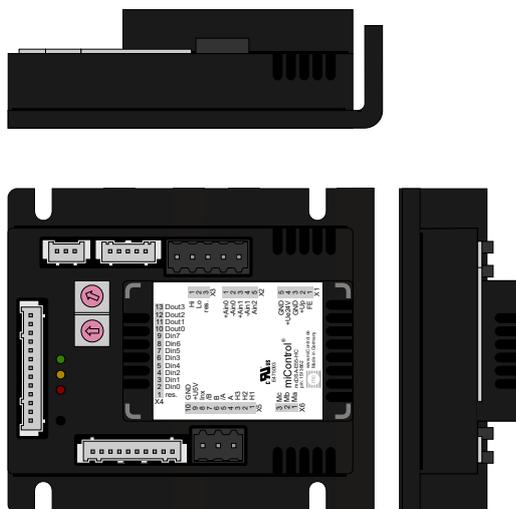

©2023 by miControl

Terminal assignment

| X1 Supply                 |        |                                      |
|---------------------------|--------|--------------------------------------|
| 1                         | FE     | Functional earth                     |
| 2                         | +Up    | Power supply voltage                 |
| 3                         | GND    | Ground for power supply voltage      |
| 4                         | +Ue24V | Electronic supply voltage            |
| 5                         | GND    | Ground for electronic supply voltage |
| X2 Analog inputs          |        |                                      |
| 1                         | +Ain0  | Analog input 0, plus                 |
| 2                         | -Ain0  | Analog input 0, minus                |
| 3                         | +Ain1  | Analog input 1, plus                 |
| 4                         | -Ain1  | Analog input 1, minus                |
| 5                         | Ain2   | Analog Input 2 (5V) / PT1000         |
| X3 CAN bus                |        |                                      |
| 1                         | CAN Hi | CAN High                             |
| 2                         | CAN Lo | CAN Low                              |
| 3                         | res.   | Reserved                             |
| X4 Digital inputs/outputs |        |                                      |
| 1                         | res.   | Reserved                             |
| 2                         | Din0   | Digital input 0                      |
| 3                         | Din1   | Digital input 1                      |
| 4                         | Din2   | Digital input 2                      |
| 5                         | Din3   | Digital input 3                      |
| 6                         | Din4   | Digital input 4                      |
| 7                         | Din5   | Digital input 5                      |
| 8                         | Din6   | Digital input 6                      |
| 9                         | Din7   | Digital input 7                      |
| 10                        | Dout0  | Digital output 0                     |
| 11                        | Dout1  | Digital output 1                     |
| 12                        | Dout2  | Digital output 2                     |
| 13                        | Dout3  | Digital output 3                     |

| X5 Hall and inc. encoder |      |   |  |
|--------------------------|------|---|--|
| 1                        | H1   | Hall sensor 1   |  |
| 2                        | H2   | Hall sensor 2   |  |
| 3                        | H3   | Hall sensor 3   |  |
| 4                        | A    | Inc. encoder, A channel   |  |
| 5                        | /A   | Inc. encoder, A channel inverted                                  |  |
| 6                        | B    | Inc. encoder, B channel   |  |
| 7                        | /B   | Inc. encoder, B channel inverted                                  |  |
| 8                        | Inx  | Inc. encoder, index channel                                       |  |
| 9                        | +U5V | 5V output voltage for sensor supply<br>Sensors: encoder, hall     |  |
| 10                       | GND  | Ground for sensor supply<br>Notice: don't connect with system GND |  |
| X6 Motor                 |      |   |  |
| 1                        | Ma   | Motor phase A   |  |
| 2                        | Mb   | Motor phase B   |  |
| 3                        | Mc   | Motor phase C   |  |