

Servo amplifier

mcDSA-E45-PN

Article number: 1513201



Picture similar

Technical data

Absolute maximum rating (destruction limits)	
Power supply voltage U_p no polarity reversal protection	80 V
Continuous Electronic supply voltage U_e no polarity reversal protection	33 V
Short term peak voltage < 1s U_e no polarity reversal protection	37 V
Power	
Electronic supply voltage U_e	9..30 V
Electronic current consumption@ $U_e=24V^{*1}$	typ. 100 mA
Power supply voltage U_p	9..60 V
Max. output current	50 A
Continuous output current @ $U_p=24V^{*2}$	10 A
Continuous output current @ $U_p=48V^{*2}$	8.5 A
PWM	
Output voltage	100% U_p
PWM frequency	25, 32 ^{*3} , 50 kHz
Mechanical	
Size LxWxH	110 x 22.5 x 77 mm
Weight	170 g
Environment	
Protection class	IP20
Ambient temperature (operation)	-25..40 °C
Ambient temperature (storage)	-25..85 °C
Rel. humidity (non-condensing)	5..90 %
CAN bus	
Protocol	DS301
Device profile	DS402
Max. baudrate	1 Mbit/s
CAN specification	2.0B
Galvanically isolated	no

PROFINET	
Type	Slave
Physical layer	100 Base-Tx
Max. baudrate	100 Mbit/s
Number of ports	2xRJ45 (PORT1, PORT2)
Sensor supply (Encoder/Hall)	
Output voltage	5 V
Max. output current	0.2 A
Incremental encoder	
Type	incremental
Signals	A,/A,B,/B,Inx,/Inx
Max. frequency (per channel)	500 kHz
Input voltage (24V tolerant)	0..5 V
Signal type	differential, open collector, single ended
Hall sensors	
Signals	H1,/H1,H2,/H2,H3,/H3
Max. frequency (per channel)	10 kHz
Input voltage (24V tolerant)	0..5 V
Signal type	differential, open collector, single ended
Digital inputs	
Number - digital inputs	8 (Din0..7)
Low voltage	0..5 V
High voltage	8..30 V
Digital outputs	
Number	2 (Dout0..1)
Continuous output current	1.5 A
Load	resistive, inductive
Output voltage	Electronic supply voltage U_e
Signal type	positive switching
Analog inputs	
Number	2 (Ain0..1)
Signal type - Ain0	+/- 10 V, 12 Bit, differential
Signal type - Ain1	+/- 10 V, 12 Bit, single ended

*1 power amplifier switched off, 5V output (sensor supply) is free, bus not connected


*2 connector cable with max. possible cable cross-section, PWM frequency 32 kHz, ambient temperature 40 °C (t >40 °C derating), RMS current: 10 A → 8.2 Aeff, 8.5 A → 6.9 Aeff

no guarantee, since value is determined empirical, please consider the application notes to determine the continuous current

*3 default value

Additional technical data are available in mcManual.

Scheme

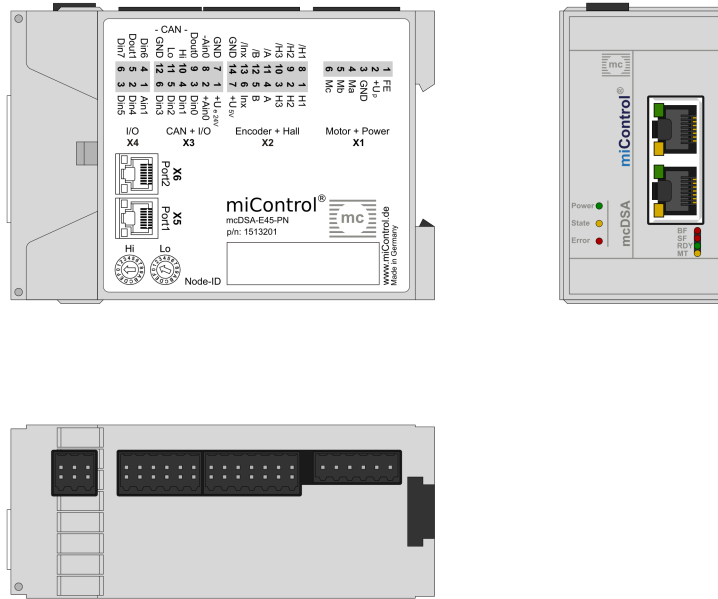

© 2021 by miControl

Terminal assignment

X1 Motor		
1	FE	Functional earth
2	+Up	Power supply voltage
3	GND	Ground for power supply voltage
4	Ma	Motor phase A
5	Mb	Motor phase B
6	Mc	Motor phase C
X2 Hall and inc. encoder		
1	H1	Hall sensor 1
2	H2	Hall sensor 2
3	H3	Hall sensor 3
4	A	Inc. encoder, A channel
5	B	Inc. encoder, B channel
6	Inx	Inc. encoder, index channel
7	+U5V	5V output voltage for sensor supply Sensors: encoder, hall
8	/H1	Hall sensor 1 inverted
9	/H2	Hall sensor 2 inverted
10	/H3	Hall sensor 3 inverted
11	/A	Inc. encoder, A channel inverted
12	/B	Inc. encoder, B channel inverted
13	/Inx	Inc. encoder, index channel inverted
14	GND	Ground for sensor supply Notice: don't connect with system GND
X3 I/O's and CAN		
1	+Ue24V	Electronic supply voltage
2	+Ain0	Analog input 0, plus
3	Din0	Digital input 0
4	Din1	Digital input 1
5	Din2	Digital input 2
6	Din3	Digital input 3
7	GND	Ground for electronic supply voltage
8	-Ain0	Analog input 0, minus
9	Dout0	Digital output 0
10	CAN Hi	CAN High
11	CAN Lo	CAN Low
12	CAN GND	CAN Ground

X4 I/O's		
1	Ain1	Analog input 1
2	Din4	Digital input 4
3	Din5	Digital input 5
4	Din6	Digital input 6
5	Dout1	Digital output 1
6	Din7	Digital input 7
X5 PROFINET - PORT1		
-	PORT1	PORT1
X6 PROFINET - PORT2		
-	PORT2	PORT2