

# Servo amplifier

## mcDSA-E47-PN

Article number: 1514450



Picture similar

**Technical data**

<b>Absolute maximum rating (destruction limits)</b>		<b>PROFINET</b>
Power supply voltage Up no polarity reversal protection	80 V	Type Slave
Continuous Electronic supply voltage Ue no polarity reversal protection	33 V	Physical layer 100 Base-Tx
Short term peak voltage < 1s Ue no polarity reversal protection	37 V	Max. baudrate 100 Mbit/s
<b>Power</b>		Number of ports 2xRJ45 (PORT1, PORT2)
Electronic supply voltage Ue	9..30 V	<b>Sensor supply (Encoder)</b>
Electronic current consumption@ Ue=24V*1	typ. 100 mA	Output voltage 5 V
Power supply voltage Up	9..60 V	Max. output current 0.2 A
Max. output current	50 A	<b>Encoder</b>
Continuous output current @ Up=24V*2	10 A	Type sin / cos
Continuous output current @ Up=48V*2	8.5 A	Signals +Sin,-Sin,+Cos,-Cos
<b>PWM</b>		Resolution 13 bit per sine period
Output voltage	100% Up	Input voltage 1 V peak-peak, differential
PWM frequency	25, 32*3, 50 kHz	Signal type sine/cosine, analog, differential
<b>Mechanical</b>		<b>Digital inputs</b>
Size LxWxH	110 x 22.5 x 77 mm	Number - digital inputs 7 (Din0..6)
Weight	170 g	Low voltage 0.5 V
<b>Environment</b>		High voltage 8..30 V
Protection class	IP20	<b>Digital outputs</b>
Ambient temperature (operation)	-25..70 °C	Number 2 (Dout0..1)
Ambient temperature (storage)	-25..85 °C	Continuous output current 1.5 A
Rel. humidity (non-condensing)	5..90 %	Load resistive, inductive
<b>CAN bus</b>		Output voltage Electronic supply voltage Ue
Protocol	DS301	Signal type positive switching
Device profile	DS402	<b>Analog inputs</b>
Max. baudrate	1 Mbit/s	Number 2 (Ain0..1)
CAN specification	2.0B	Signal type - Ain0 +/- 10 V, 12 Bit, differential
Galvanically isolated	no	Signal type - Ain1 +/- 10 V, 12 Bit, single ended

\*1 power amplifier switched off, 5V output (sensor supply) is free, bus not connected

\*2 connector cable with max. possible cable cross-section, PWM frequency 32 kHz, ambient temperature 40 °C (t &gt;40 °C derating), RMS current: 10 A → 8.2 Aeff, 8.5 A → 6.9 Aeff

no guarantee, since value is determined empirical, please consider the application notes to determine the continuous current

\*3 default value

Additional technical data are available in mcManual.




miControl® GmbH

Chausseestraße 34

14979 Großbeeren (bei Berlin)

Copyright 2022 by miControl® - Modifications and errors excepted  
mcDSA-E47-PN - PV1.0F.00.00 / DV1.00.00.04Web: [www.miControl.de](http://www.miControl.de) e-mail: [info@miControl.de](mailto:info@miControl.de) Tel.: +49 (3379) 312 59-0 Fax: +49 (3379) 312 59-19

## Scheme

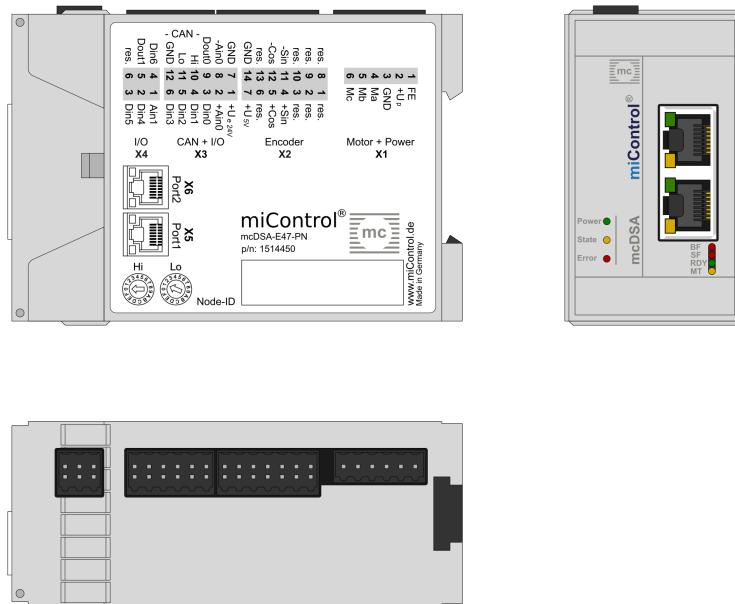

©2021 by miControl

## Terminal assignment

X1	Motor	
1	FE	Functional earth
2	+Up	Power supply voltage
3	GND	Ground for power supply voltage
4	Ma	Motor phase A
5	Motor phase B	
6	Mc	Motor phase C
X2	Encoder	
1	res.	Reserved
2	res.	Reserved
3	res.	Reserved
4	+Sin	Encoder, plus sine signal
5	+Cos	Encoder, plus cosine signal
6	res.	Reserved
7	+U5V	5V output voltage for sensor supply Sensors: encoder
8	res.	Reserved
9	res.	Reserved
10	res.	Reserved
11	-Sin	Encoder, minus sine signal
12	-Cos	Encoder, minus cosine signal
13	res.	Reserved
14	GND	Ground for sensor supply Notice: don't connect with system GND
X3	I/O's and CAN	
1	+Ue24V	Electronic supply voltage
2	+Ain0	Analog input 0, plus
3	Din0	Digital input 0
4	Din1	Digital input 1
5	Din2	Digital input 2
6	Din3	Digital input 3
7	GND	Ground for electronic supply voltage
8	-Ain0	Analog input 0, minus
9	Dout0	Digital output 0
10	CAN Hi	CAN High
11	CAN Lo	CAN Low
12	CAN GND	CAN Ground
X4	I/O's	
1	Ain1	Analog input 1
2	Din4	Digital input 4
3	Din5	Digital input 5
4	Din6	Digital input 6
5	Dout1	Digital output 1
6	res.	Reserved
X5	PROFINET - PORT1	
-	PORT1	PORT1
X6	PROFINET - PORT2	
-	PORT2	PORT2