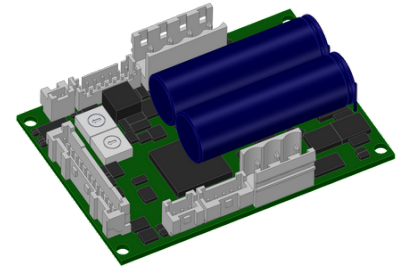


# Servo amplifier

## mcDSA-F37-Lp

Article number: 1514228

 Certification:    \*1


Picture similar

### Technical data

Supply voltages	
Electronic supply voltage $U_e^{*2}$	18..30 V
Electronic current consumption @ $U_e=24V^{*3}$	typ. 65 mA
Power supply voltage $U_p^{*4}$	9..60 V
Output current	
Max. output current	120 A
Continuous output current (certified UL/CE) <sup>*5</sup>	
@ $U_p \leq 24V$	19.5 A
@ $U_p \leq 60V$	13.4 A
Continuous output current (not certified) <sup>*6</sup>	
@ $U_p \leq 24V$	21 A
@ $U_p \leq 48V$	15 A
PWM	
PWM frequency	32 kHz
Commutation type	Field Oriented Control
Mechanical	
Size LxWxH	70 x 50 x 19 mm
Weight	50 g
Environment	
Protection class	IP00
Installation requirements <sup>*7</sup>	IP54
Ambient temperature (operation) (certified UL)	-40..50 °C
Ambient temperature (operation) (certified CE/not certified)	-40..70 °C
Ambient temperature (storage)	-40..85 °C
Rel. humidity (non-condensing)	5..90 %
CAN bus	
Protocol	DS301
Device profile	DS402
Max. baudrate	1 Mbit/s
CAN specification	2.0B
Galvanically isolated	no
RS485	
Type	2-Wire EIA-485
Signals	DATA,/DATA,CLK,/CLK
Functional safety	
Safety function refer safety manual	Safe Torque Off (STO)
Safety Integrity Level (SIL)	up to SIL 3
Performance Level (PL)	up to PL e

Sensor supply (Hall)	
Output voltage	5 V
Max. output current	0.05 A
Sensor supply (Encoder/SSI)	
Output voltage	5 V
Max. output current	0.2 A
Sensor supply (Hiperface)	
Output voltage	10 V
Max. output current	0.25 A
Encoder	
Type	sin / cos
Signals	+Sin,-Sin,+Cos,-Cos
Resolution	13 bit per sine period
Input voltage	1 V peak-peak, differential
Signal type	sine/cosine, analog, differential
Hall sensors	
Signals	H1,H2,H3
Max. frequency (per channel)	10 kHz
Input voltage	0..5 V
Signal type	open collector, single ended
Digital inputs	
Number - digital inputs	6 (Din0..5)
Low voltage	0..5 V
High voltage	8..30 V
STO channels (ST0-A..B)	
Low voltage	0..5 V
High voltage	8..30 V
Digital outputs	
Number	3 (Dout0..2)
Continuous output current (certified UL/CE)	1 A
Continuous output current (not certified)	1.5 A
Load Dout0..1	resistive, low inductive
Load Dout2	resistive, inductive
Output voltage	Electronic supply voltage $U_e$
Signal type	positive switching
Analog inputs	
Number	1 (Ain0)
Signal type - Ain	+/- 10 V, 12 Bit, differential

\*1 The certified performance data must be observed (see UL Instruction Note and Safety Manual (CE))

\*2 No reverse polarity protection, the destruction limit is at overvoltage of  $\geq 33V$  or short-term peak voltage of  $37V < 1s$

\*3 power amplifier switched off, 5V output (sensor supply) is free, STO active

\*4 No reverse polarity protection, the destruction limit is at overvoltage of  $\geq 70V$

\*5 connector cable with max. possible cable cross-section, PWM frequency 32 kHz (SVPWM), ambient temperature 50 °C, I/O's and 5V output active, RMS current: 19.5 A → 14 Aeff, 13.4 A → 9.5 Aeff

\*6 connector cable with max. possible cable cross-section, PWM frequency 32 kHz (SVPWM), ambient temperature 40 °C, I/O's and 5V output free, RMS current: 21 A → 14.8 Aeff, 15 A → 10.6 Aeff

no guarantee, since value is determined empirical, please consider the application notes to determine the continuous current

\*7 or equivalent protection class (see Safety Manual (CE))

Additional technical data are available in mcManual.



miControl® GmbH


Chausseestraße 34

14979 Großbeeren (bei Berlin)

 Copyright 2024 by miControl® - Modifications and errors excepted  
 mcDSA-F37-Lp - PV1.14.00.00 / DV1.00.01.07

Web: www.miControl.de e-mail: info@miControl.de Tel.: +49 (3379) 312 59-0 Fax: +49 (3379) 312 59-19

## Scheme

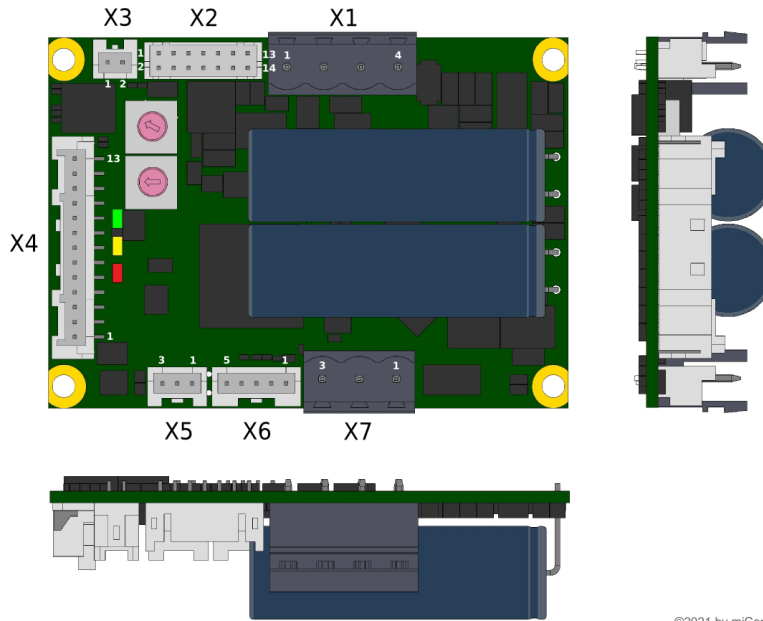

©2021 by miControl

## Terminal assignment

X1 Supply		
1	GND	Ground for electronic supply voltage
2	+Ue24V	Electronic supply voltage
3	GND	Ground for power supply voltage
4	+Up	Power supply voltage
X2 Encoder		
1	CLK	SSI clk
2	/CLK	/SSI clk
3	DATA	SSI data
4	/DATA	/SSI data
5	+10V	10V output voltage for sensor supply Sensors: Hiperface
6	GND	Ground for sensor supply Notice: don't connect with system GND
7	+SIN	Encoder, plus sine signal
8	-SIN	Encoder, minus sine signal
9	+COS	Encoder, plus cosine signal
10	-COS	Encoder, minus cosine signal
11	res.	Reserved
12	res.	Reserved
13	+5V	5V output voltage for sensor supply Sensors: encoder, SSI
14	GND	Ground for sensor supply Notice: don't connect with system GND
X3 PT1000		
1	PT_A	PT_A
2	PT_B	PT_B
X4 I/O's		
1	STO-B	STO channel B
2	Din0	Digital input 0
3	Din1	Digital input 1
4	Din2	Digital input 2
5	Din3	Digital input 3
6	Din4	Digital input 4
7	Din5	Digital input 5
8	STO-A	STO channel A
9	+Ain0	Analog input, plus
10	-Ain0	Analog input, minus
11	Dout0	Digital output 0
12	Dout1	Digital output 1
13	Dout2	Digital output 2

X5 CAN bus		
1	CAN Hi	CAN High
2	CAN Lo	CAN Low
3	CAN GND	CAN Ground
X6 Hall encoder		
1	H1	Hall sensor 1
2	H2	Hall sensor 2
3	H3	Hall sensor 3
4	+U5V	5V output voltage for sensor supply Sensors: hall
5	GND	Ground for sensor supply Notice: don't connect with system GND
X7 Motor		
1	Ma	Motor phase A
2	Mb	Motor phase B
3	Mc	Motor phase C