


Servo amplifier

mcDSA-S40

Article number: 1511164

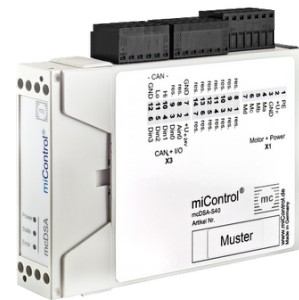

Picture similar

Technical data

Absolute maximum rating (destruction limits)	
Power supply voltage U_p no polarity reversal protection	80 V
Continuous Electronic supply voltage U_e no polarity reversal protection	33 V
Short term peak voltage < 1s U_e no polarity reversal protection	37 V
Power	
Electronic supply voltage U_e	9..30 V
Electronic current consumption@ $U_e=24V^{*1}$	typ. 35 mA
Power supply voltage U_p	9..60 V
Max. output current	20 A
Continuous output current @ $U_p=24V^{*2}$	7 A
Continuous output current @ $U_p=48V^{*2}$	6 A
PWM	
Output voltage	85% U_p
PWM frequency	32 kHz
Mechanical	
Size LxWxH	110 x 23 x 77 mm
Weight	110 g
Environment	
Protection class	IP20
Ambient temperature (operation) ^{*3}	-40..70 °C
Ambient temperature (storage)	-40..85 °C
Rel. humidity (non-condensing)	5..90 %
CAN bus	
Protocol	DS301
Device profile	DS402
Max. baudrate	1 Mbit/s
CAN specification	2.0B
Galvanically isolated	no

Auxiliary voltage	
Output voltage	5 V
Max. output current	0.2 A
Digital inputs	
Number - digital inputs	4 (Din0..3)
Low voltage	0..5 V
High voltage	8..30 V
Analog inputs	
Number	1 (Ain0)
Signal type	0..10 V, 12 Bit, single ended

*1 power amplifier switched off, 5V output (sensor supply) is free


*2 connector cable with max. possible cable cross-section, PWM frequency 32 kHz, ambient temperature 40 °C (t >40 °C derating), RMS current: 7 A → 5.7 Aeff, 6 A → 4.9 Aeff

no guarantee, since value is determined empirical, please consider the application notes to determine the continuous current

*3 Hex-Switches should be not used at T < -25°C (setting of node ID only possible by firmware parameters)

Additional technical data are available in mcManual.

Scheme

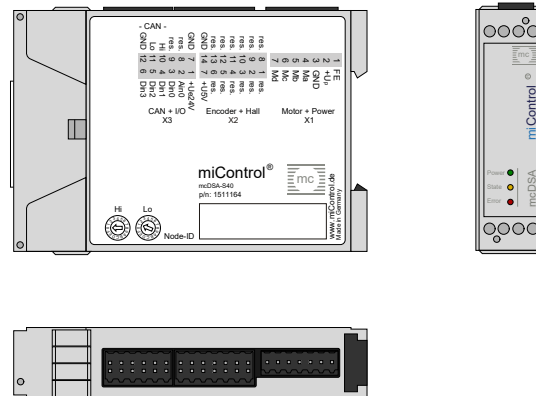

©2023 by miControl

Terminal assignment

X1 Motor		
1	FE	Functional earth
2	+Up	Power supply voltage
3	GND	Ground for power supply voltage
4	Ma	Motor phase A
5	Mb	Motor phase B
6	Mc	Motor phase C
7	Md	Motor phase D
X2 Reserved		
1	res.	Reserved
2	res.	Reserved
3	res.	Reserved
4	res.	Reserved
5	res.	Reserved
6	res.	Reserved
7	+U5V	5V output voltage (auxiliary voltage)
8	res.	Reserved
9	res.	Reserved
10	res.	Reserved
11	res.	Reserved
12	res.	Reserved
13	res.	Reserved
14	GND	Ground of the auxiliary voltage Notice: don't connect with system GND
X3 I/O's and CAN		
1	+Ue24V	Electronic supply voltage
2	Ain0	Analog input 0
3	Din0	Digital input 0
4	Din1	Digital input 1
5	Din2	Digital input 2
6	Din3	Digital input 3
7	GND	Ground for electronic supply voltage
8	res.	Reserved
9	res.	Reserved
10	CAN Hi	CAN High
11	CAN Lo	CAN Low
12	CAN GND	CAN Ground