

# Servo amplifier

## mcDSA-F30-HC

Article number: 1513999

 Certification: 


Picture similar

### Technical data

Supply voltages	
Electronic supply voltage Ue*2	18..30 V
Electronic current consumption@ Ue=24V*3	typ. 65 mA
Power supply voltage Up*4	9..60 V
Output current	
Max. output current	60 A
Continuous output current (certified UL)*5	
@Up ≤ 24V	26 A
@Up ≤ 60V	26 A
Continuous output current (certified CE)*6	
@Up ≤ 24V	33.5 A
@Up ≤ 60V	32 A
Continuous output current (not certified)*7	
@Up ≤ 24V	33.5 A
@Up ≤ 48V	33 A
PWM	
PWM frequency	32 kHz
Commutation type	Field Oriented Control
Mechanical	
Size LxWxH	87 x 74 x 29 mm
Weight	155 g
Environment	
Protection class	IP20
Installation requirements **	IP54
Ambient temperature (operation) (certified UL)	-40..50 °C
Ambient temperature (operation) (certified CE)	-40..55 °C
Ambient temperature (operation) (not certified)	-40..70 °C
Ambient temperature (storage)	-40..85 °C
Rel. humidity (non-condensing)	5..90 %
CAN bus	
Protocol	DS301
Device profile	DS402
Max. baudrate	1 Mbit/s
CAN specification	2.0B
Galvanically isolated	no
RS485	
Type	2-Wire EIA-485
Signals	DATA,/DATA,CLK,/CLK

Functional safety	
Safety function refer safety manual	Safe Torque Off (STO)
Safety Integrity Level (SIL)	up to SIL 3
Performance Level (PL)	up to PL e
Sensor supply (Hall)	
Output voltage	5 V
Max. output current	0.05 A
Sensor supply (Encoder/SSI)	
Output voltage	5 V
Max. output current	0.2 A
Incremental encoder	
Type	incremental
Signals	A,/A,B,/B,Inx,/Inx
Max. frequency (per channel)	500 kHz
Input voltage	0..5 V
Signal type	differential, open collector, single ended
Hall sensors	
Signals	H1,H2,H3
Max. frequency (per channel)	10 kHz
Input voltage	0..5 V
Signal type	open collector, single ended
Digital inputs	
Number - digital inputs	6 (Din0..5)
Low voltage	0..5 V
High voltage	8..30 V
STO channels (STO-A..B)	
Low voltage	0..5 V
High voltage	8..30 V
Digital outputs	
Number	3 (Dout0..2)
Continuous output current (certified UL/CE)	1 A
Continuous output current (not certified)	1.5 A
Load Dout0..1	resistive, low inductive
Load Dout2	resistive, inductive
Output voltage	Electronic supply voltage Ue
Signal type	positive switching
Analog inputs	
Number	2 (Ain0..1)
Signal type - Ain	0..10 V, 12 Bit, single ended

\*1 The certified performance data must be observed (see UL Instruction Note and Safety Manual (CE))

\*2 No reverse polarity protection, the destruction limit is at overvoltage of  $\geq 33V$  or short-term peak voltage of  $37V < 1s$

\*3 power amplifier switched off, 5V output (sensor supply) is free, STO active

\*4 No reverse polarity protection, the destruction limit is at overvoltage of  $\geq 70V$

\*5 connector cable with max. possible cable cross-section, PWM frequency 32 kHz (SVPWM), ambient temperature 50 °C, I/O's and 5V output active, RMS current: 26 A → 18.5 Aeff

\*6 connector cable with max. possible cable cross-section, PWM frequency 32 kHz (SVPWM), ambient temperature 40 °C, I/O's and 5V output active, RMS current: 33.5 A → 23.7 Aeff, 32 A → 22.6 Aeff

\*7 connector cable with max. possible cable cross-section, PWM frequency 32 kHz (SVPWM), ambient temperature 40 °C, I/O's and 5V output free, RMS current: 33.5 A → 23.7 Aeff, 33 A → 23.3 Aeff

no guarantee, since value is determined empirical, please consider the application notes to determine the continuous current

\*8 or equivalent protection class (see Safety Manual (CE))

Additional technical data are available in mcManual.



miControl® GmbH


Chausseestraße 34

14979 Großbeeren (bei Berlin)

 Copyright 2024 by miControl® - Modifications and errors excepted  
 mcDSA-F30-HC - PV1.14.00.00 / DV1.00.01.08

Web: www.miControl.de e-mail: info@miControl.de Tel.: +49 (3379) 312 59-0 Fax: +49 (3379) 312 59-19

## Scheme

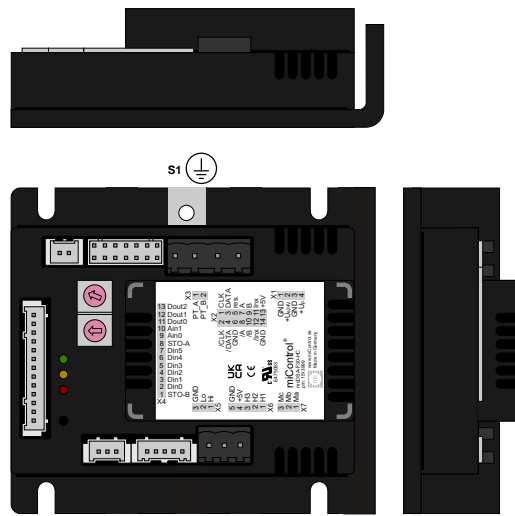

©2023 by miControl

### Terminal assignment


X1 Supply		
1	GND	Ground for electronic supply voltage
2	+Ue24V	Electronic supply voltage
3	GND	Ground for power supply voltage
4	+Up	Power supply voltage
X2 Encoder		
1	CLK	SSI clk
2	/CLK	/SSI clk
3	DATA	SSI data
4	/DATA	/SSI data
5	res.	Reserved
6	GND	Ground for sensor supply Notice: don't connect with system GND
7	A	Inc. encoder, A channel
8	/A	Inc. encoder, A channel inverted
9	B	Inc. encoder, B channel
10	/B	Inc. encoder, B channel inverted
11	Inx	Inc. encoder, index channel
12	/Inx	Inc. encoder, index channel inverted
13	+5V	5V output voltage for sensor supply Sensors: encoder, SSI
14	GND	Ground for sensor supply Notice: don't connect with system GND
X3 PT1000		
1	PT_A	PT_A
2	PT_B	PT_B
X4 I/O's		
1	STO-B	STO channel B
2	Din0	Digital input 0
3	Din1	Digital input 1
4	Din2	Digital input 2
5	Din3	Digital input 3
6	Din4	Digital input 4
7	Din5	Digital input 5
8	STO-A	STO channel A
9	Ain0	Analog input 0
10	Ain1	Analog input 1
11	Dout0	Digital output 0
12	Dout1	Digital output 1
13	Dout2	Digital output 2

X5 CAN bus		
1	CAN Hi	CAN High
2	CAN Lo	CAN Low
3	CAN GND	CAN Ground
X6 Hall encoder		
1	H1	Hall sensor 1
2	H2	Hall sensor 2
3	H3	Hall sensor 3
4	+U5V	5V output voltage for sensor supply Sensors: hall
5	GND	Ground for sensor supply Notice: don't connect with system GND
X7 Motor		
1	Ma	Motor phase A
2	Mb	Motor phase B
3	Mc	Motor phase C
S1 Screw (M3)		
-	FE	Functional earth

Diagrams

miControl®

mcDSA-F30-HC Rev.A1

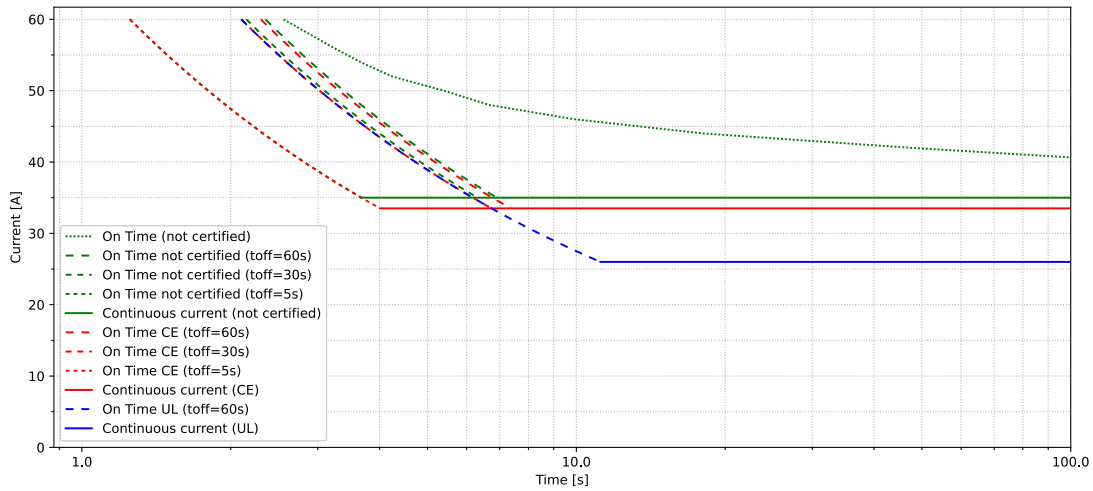


ambient temperature 40°C  
 power supply voltage Up 24V  
 PWM frequency 32kHz  
 PWM mode asymmetric  
 inductance per motor phase 150µH  
 continuous current 33.5A

Copyright 2023© by miControl® - Modifications and errors excepted - 1.00.00.03

miControl®

mcDSA-F30-HC Rev.A1

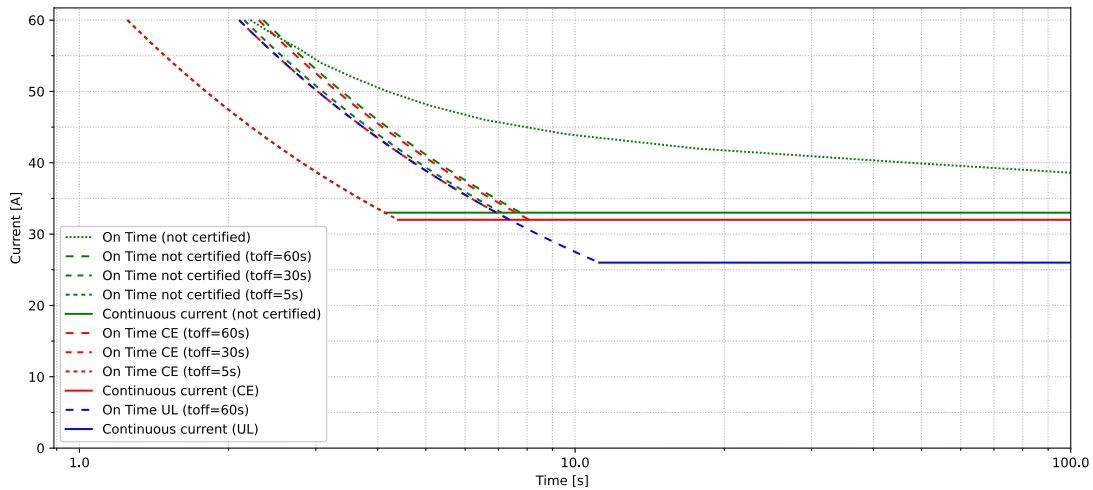

ambient temperature 40°C  
 power supply voltage Up 60V  
 PWM frequency 32kHz  
 PWM mode asymmetric  
 inductance per motor phase 150µH  
 continuous current 33A


Copyright 2023© by miControl® - Modifications and errors excepted - 1.00.00.03



Diagrams

miControl®

mcDSA-F30-HC Rev.A1

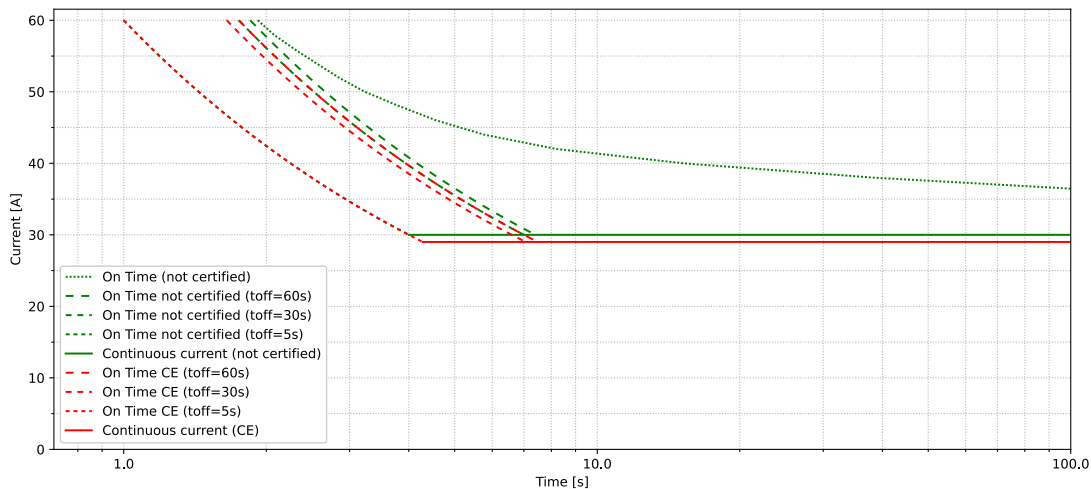


ambient temperature 55°C  
 power supply voltage Up 24V  
 PWM frequency 32kHz  
 PWM mode asymmetric  
 inductance per motor phase 150µH  
 continuous current 30A

Copyright 2023© by miControl® - Modifications and errors excepted - 1.00.00.03

miControl®

mcDSA-F30-HC Rev.A1

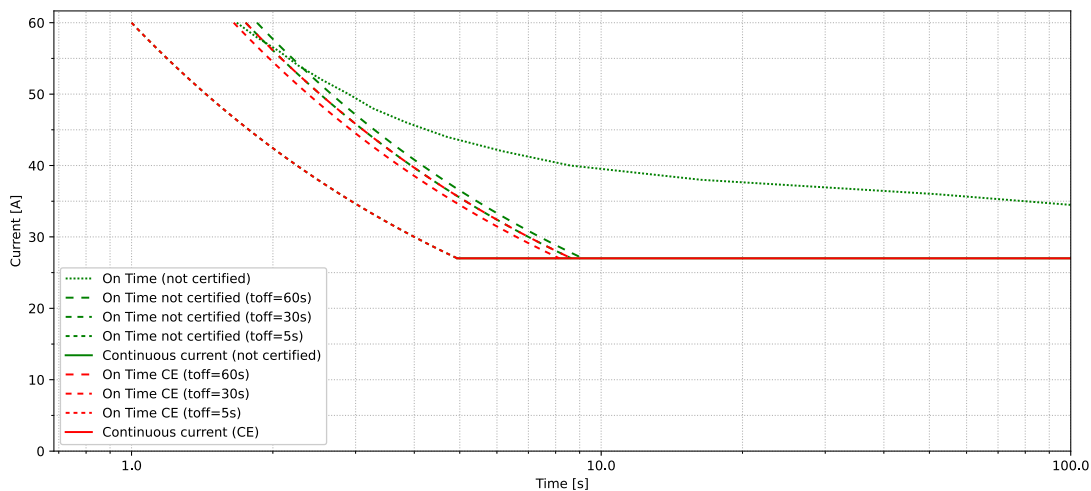

ambient temperature 55°C  
 power supply voltage Up 60V  
 PWM frequency 32kHz  
 PWM mode asymmetric  
 inductance per motor phase 150µH  
 continuous current 27A


Copyright 2023© by miControl® - Modifications and errors excepted - 1.00.00.03



Diagrams

miControl®

mcDSA-F30-HC Rev.A1

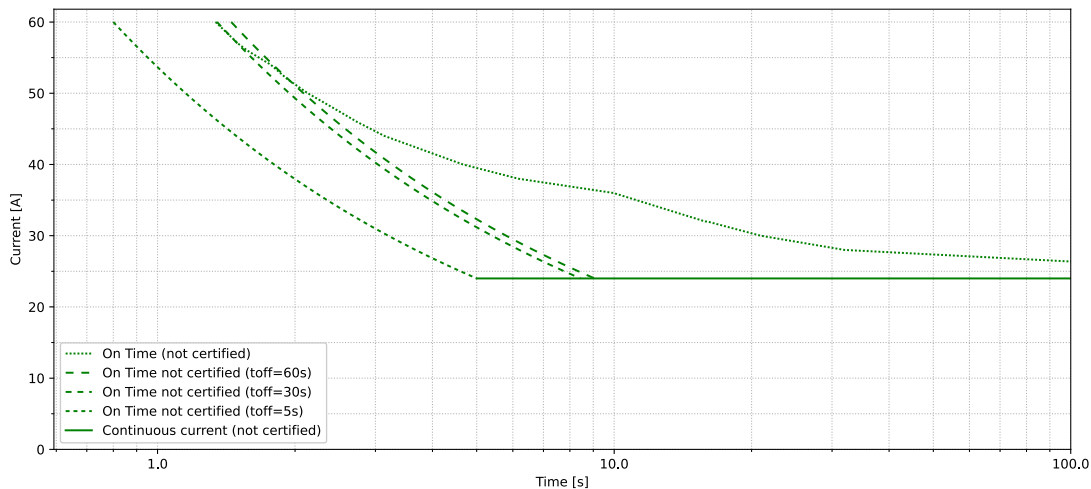


ambient temperature 70°C  
 power supply voltage Up 24V  
 PWM frequency 32kHz  
 PWM mode asymmetric  
 inductance per motor phase 150µH  
 continuous current 24A

Copyright 2023© by miControl® - Modifications and errors excepted - 1.00.00.03

miControl®

mcDSA-F30-HC Rev.A1

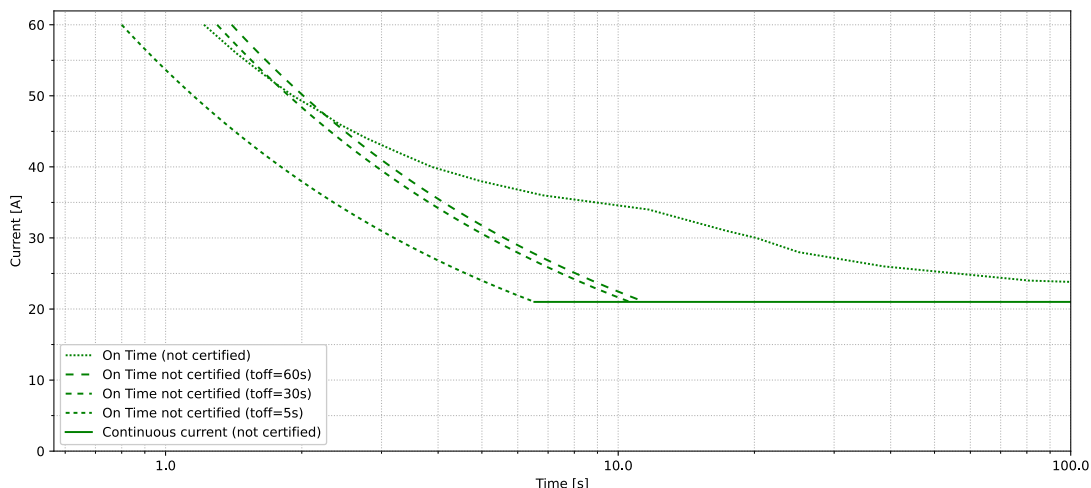

ambient temperature 70°C  
 power supply voltage Up 60V  
 PWM frequency 32kHz  
 PWM mode asymmetric  
 inductance per motor phase 150µH  
 continuous current 21A

Copyright 2023© by miControl® - Modifications and errors excepted - 1.00.00.03

