

# Brake chopper

## mcER-L60-60

Article number: 1515428

 Certification: 


Picture similar

### Technical data

Absolute maximum rating	
Voltage (destruction limit) no polarity reversal protection	100 V
Power	
Electronic supply voltage $U_p$	18..60 V
Electronic current consumption	typ. 10 mA
Max. braking peak current (certified UL)*2	60 A @ 60 V
Max. braking continuous current (certified UL)*2	5 A
On-Time / Off-Time (certified UL)*2	approx. 1 s / 90 s @ 60 A
Braking resistor	
Braking voltage $U_{Br}$	60 V
Braking resistor	min. 1 Ohm (external)
Maximum duty cycle	100 %
Integrated electrolytic capacitors	100 uF
Mechanical	
Size LxWxH	74 x 45 x 24 mm
Weight	30 g
Environment	
Protection class	IP20
Ambient temperature (operation) (certified UL)	-40..55 °C
Ambient temperature (operation) (not certified)	-40..70 °C
Ambient temperature (storage)	-40..85 °C
Rel. humidity (non-condensing)	5..90 %
Error recognition	
Short circuit braking resistor	yes
Braking resistor is missing / defective	yes
Overtemperature electronic	yes
Overtemperature braking resistor	no

Digital output	
Number	1 (/Error)
Continuous output current	typ. 10 mA
Load	resistive
Output voltage	Up (24V max.)
Signal type	positive switching


\*1 The certified performance data must be observed (see UL Instruction Note)

\*2 ambient temperature 55 °C

Additional technical data are available in mcManual.



## Scheme

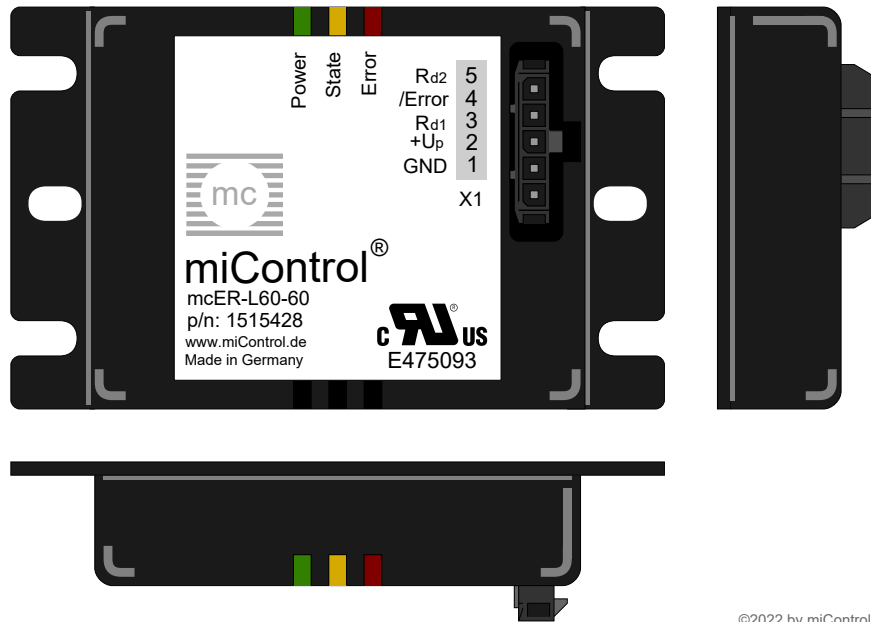

©2022 by miControl


## Terminal assignment

X1	Supply	
1	GND	Ground for power supply voltage
2	+Up	Power supply voltage
3	Rd1	Braking resistor
4	/Error	Error output
5	Rd2	Braking resistor

## Diagrams

### miControl®

### mcER-L60-60

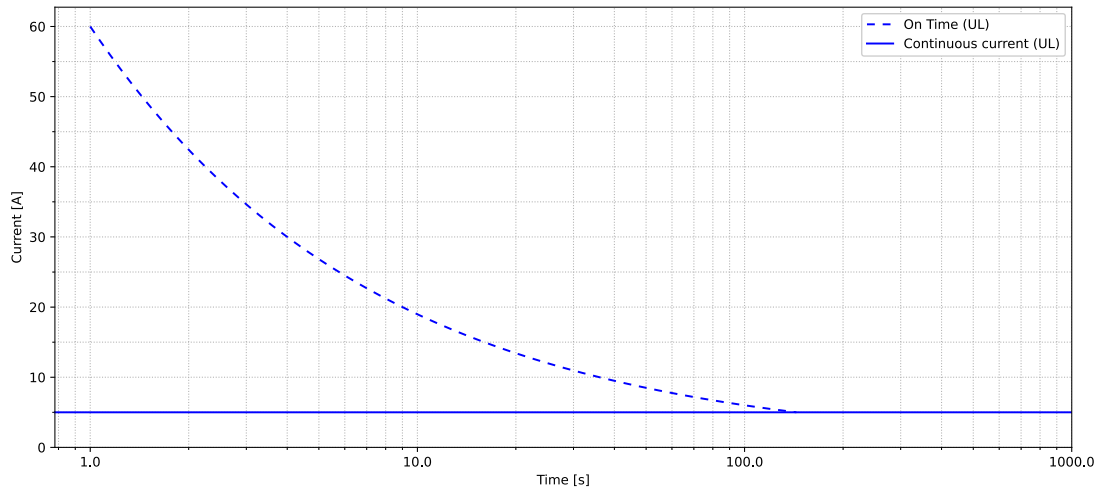

ambient temperature 55°C  
power supply voltage Up 60V  
continuous current 5A

Copyright 2023© by miControl® - Modifications and errors excepted - 1.00.00.00

