

Gateway

miCAN-Stick2-Modul

Article number: 1510199




Picture similar

Technical data

Power	
Electronic supply voltage Ue	5 V (Pin X2.1)
Electronic current consumption	typ. 100 mA
Mechanical	
Size LxWxH	42.5 x 17 x 12.5 mm
Weight	4 g
Environment	
Protection class	IP00
Ambient temperature (operation)	-25..55 °C
Ambient temperature (storage)	-25..85 °C
Rel. humidity (non-condensing)	5..90 %
CAN bus	
CAN specification	2.0B
Max. baudrate	1 Mbit/s
Galvanically isolated	yes
Bus terminator	120 Ohm on/off switchable
USB	
Interface	USB 2.0
Supported operating systems	Windows XP, Windows Vista, Windows 7, Windows 8 (32/64-bit), Windows 10 (32/64-bit)
Driver	Installation of mPLC needed
Notice	The drivers support virtual COM port (VCP)
Virtual COM port protocol	ASCII protocol based on DS309-3

Scheme

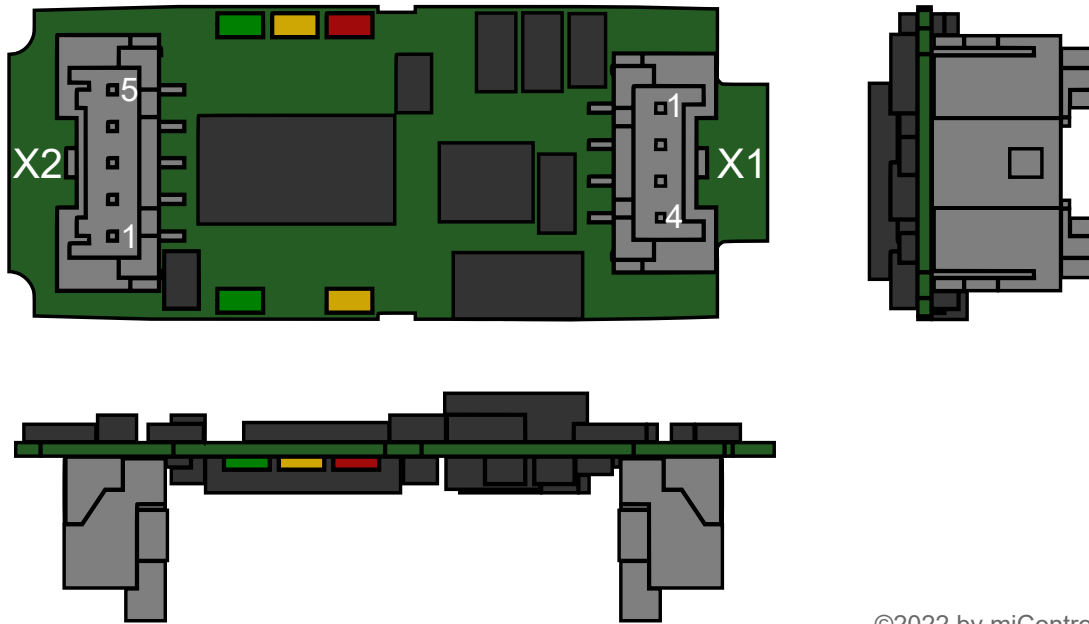

©2022 by miControl

Terminal assignment

X1	CAN	
1	FE	Functional earth
2	GND	Ground
3	CAN Lo	CAN Low
4	CAN Hi	CAN High
X2	USB	
1	VBUS	USB VBUS
2	D-	USB D-
3	D+	USB D+
4	GND	Ground
5	FE	Functional earth